



CELLUX IP65




SPECIFICATION		DATA	
Material and thickness	Cold roll steel 0.8mm	System power	38W
Diffuser Material	Polycarbonate	Total Lumen	3240LM
Reflector/purity	98%CHINESE	System efficiency	90LM/W
Cross plates Quantity V	10	UGR	<15
Frame Material/color	Metal/White	Beam angel	83.8
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP65	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG LG
Connector	LED PCB board	4PCS
Cut out hole	570x570mm	CRI	>80
External size	595x595mm	LM80 8000 hours	97.9(55degrees)
Weight	6.2KGS	L70/B50 hours	YES
Size	595x595x85mm	IES file available	YES
Box Quantity packaging size	62x61x9cm	LM79	YES
Quantity for 40"HighCube	1680pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	54-150V

CELLUX IP65 38W LED


This luminaire contains built-in LED lamps.

The LED lamps cannot be changed in the luminaire

874/2012



H(m)	D(m)	Max lux	Med lux	Alpha=83,8°	Max lux at G
1,00	3,91	1524	435		
2,00	7,82	381	109		
3,00	11,73	169	48		
4,00	15,63	95	27		
5,00	19,54	61	17		

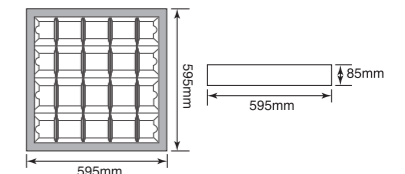

Recessed on Request

Recessed on Request