




SPECIFICATION		DATA	
Material and thickness	Cold roll steel 0.8mm	System power	40W
Diffuser Material	PC	Total Lumen	3680LM
Reflector/purity	98%CHINESE	System efficiency	92LM/W
Cross plates Quantity V	21	UGR	<16
Frame Material/color	Metal/White	Beam angel	100
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP20	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG LG
Connector	Linect/GST18i3	LED PCB board	2PCS
Cut out hole	570x570mm	CRI	>80
External size	595x595mm	LM80 8000 hours	97.9(55degrees)
Weight	3.86KGS	L70/B50 hours	YES
Size	595x595x100mm	IES file available	YES
Box Quantity packaging size	62x61x11cm	LM79	YES
Quantity for 40"HighCube	1500pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	54-150V



COMBINICE 40W LED

 This luminaire contains built-in LED lamps.


 LED


The LED lamps cannot be changed in the luminaire

874/2012 

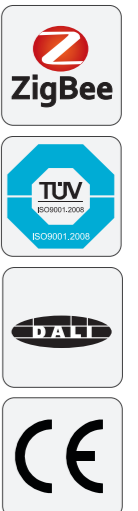


H[m]	D[m]	Max lux	Med lux
1,00	3,91	1524	435
2,00	7,82	381	109
3,00	11,73	169	48
4,00	15,63	95	27
5,00	19,54	61	17

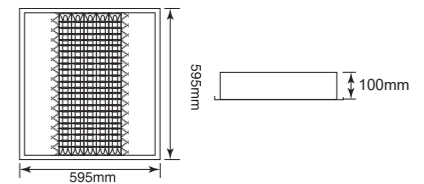


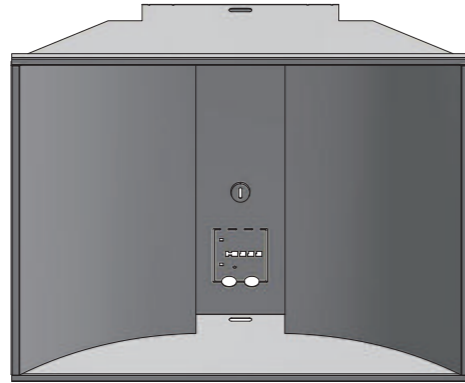

MULTI-HOUSING WITH SMOOTH OR ROUGHT PAINT ACCORDINGLY TO RALXXXX COLOR SYSTEM

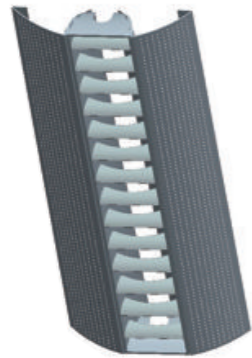

SINGLE LOUVRE BASKET

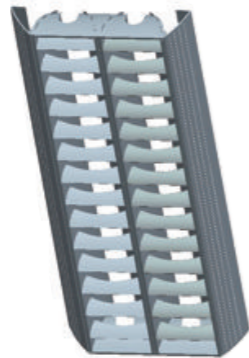

DOUBLE LOUVRE BASKET



FULL PERFORATION BASKET

PRISMATIC WINGS STAND BOTH SIDE WITH HOLDING ALUMINIUM RASTER DISTRIBUTE PLEASANT LIGHT FROM DIFFEENT ANGLES

LOW COLOR TOLERANCE AND HIGH VALUE FOR COLOR RENDERING WITH DOUBLE COOPER COATED TO OPTIMISED TEMPERATURE FOR SIMPLIFIED THERMAL MANAGMENT.

MULTI-HOUSING WITH SMOOTH OR ROUGHT PAINT ACCORDINGLY TO RALXXXX COLOR SYSTEM

REEDY OPAL DIFFUSER FILTERING DAZZLE LIGHT FROM LED INITIAL SOURCE CREATING SOFT LIGHT SPELL TO ALL LOUVRE.

MOVABLE PLATE WITH HOOK BRILLIANT DESIGN TO OPEN EASILY AND RATHER THAN OPEL WHOLE PCT PLATE WHILE POWER CONNECTION

"POP UP™" "CLIP SUPPLY ELECTRICIAN WITH CONVENIENCE FOR MAINTENANCE TO REPLACE DIFFERENT CCT LED BAR

