




# MAXBAY

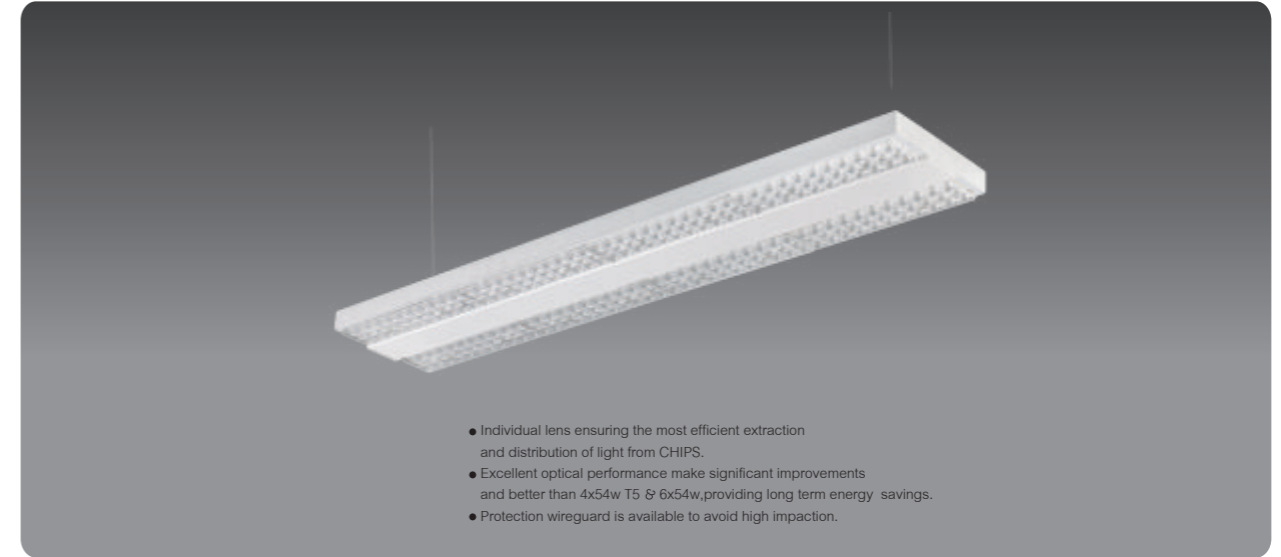


- Individual lens ensuring the most efficient extraction and distribution of light from CHIPS.
- Excellent optical performance make significant improvements and better than 4x54w T5 & 6x54w, providing long term energy savings.
- Protection wireguard is available to avoid high impact.

SPECIFICATION	DATA		
Material and thickness	Cold roll steel 0.8mm	System power	226W
Diffuser Material	PMMA	Total Lumen	24787LM
Reflector/purity	.....	System efficiency	110LM/W
Cross plates Quantity V	0	UGR	<19
Frame Material/color	Metal/White	Beam angel	73.7
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP20	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG SEOUL
Connector	.....	LED PCB board	8PCS
Cut out hole	.....	CRI	>80
External size	1245x215mm	LM80 8000 hours	97.9(55degrees)
Weight	6.4KGS	L70/B50 hours	YES
Size	1145x215x45mm	IES file available	YES
Box Quantity packaging size	22.5x5.5x116cm	LM79	YES
Quantity for 40*HighCube	4500pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	100~220V

MAXBAY 100W LED



This luminaire contains built-in LED lamps.



LED

The LED lamps cannot be changed in the luminaire

874/2012

