




SPECIFICATION		DATA	
Material and thickness	Cold roll steel 0.8mm	System power	38W
Diffuser Material	Polycarbonate	Total Lumen	3420LM
Reflector/purity	98%CHINESE	System efficiency	90LM/W
Cross plates Quantity V	5	UGR	<15
Frame Material/color	Metal/White	Beam angel	91.1
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP20	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG LG
Connector	Linect/GST18i3	LED PCB board	12PCS
Cut out hole	CRI	>80
External size	595x595mm	LM80 8000 hours	97.9(55degrees)
Weight	6.4KGS	L70/B50 hours	YES
Size	595x595x55mm	IES file available	YES
Box Quantity packaging size	62x61x6.5cm	LM79	YES
Quantity for 40*HighCube	2700pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	54~150V


PROSIX 38W LED

 This luminaire contains built-in LED lamps.


 LED


The LED lamps cannot be changed in the luminaire

874/2012 



H[m]	D[m]	Max lux	Med lux	Beta=91.1°	G=0,0 Max not at G
1,00	1,52	2812	1640		
2,00	3,05	703	410		
3,00	4,57	312	182		
4,00	6,10	176	102		
5,00	7,62	112	66		

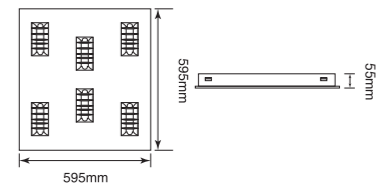

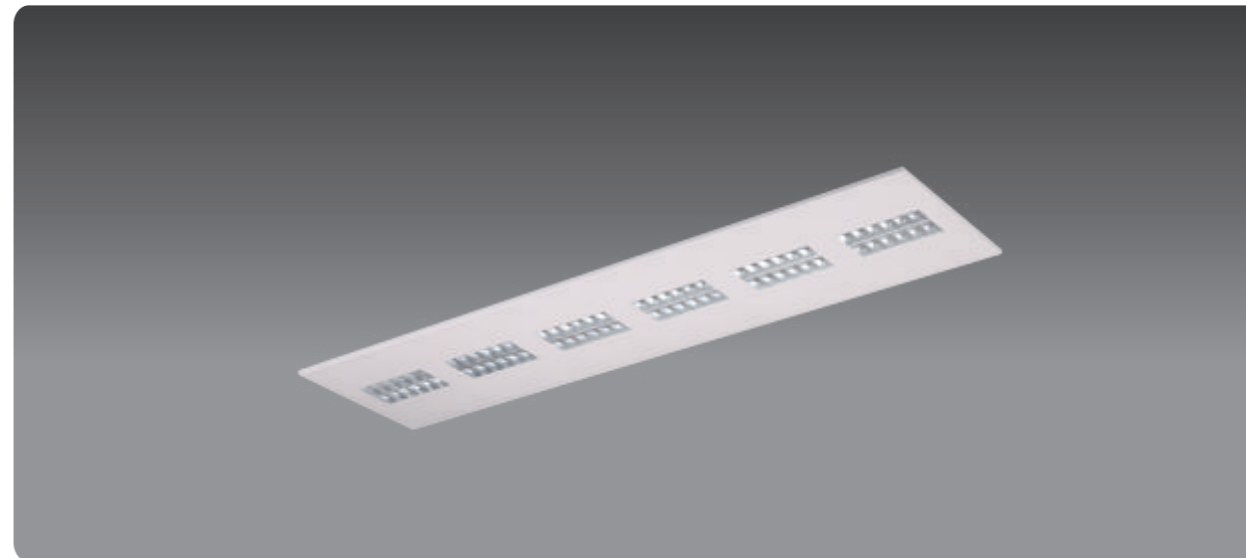

SPECIFICATION		DATA	
Material and thickness	Cold roll steel 0.8mm	System power	38W
Diffuser Material	Polycarbonate	Total Lumen	3420LM
Reflector/purity	98%CHINESE	System efficiency	90LM/W
Cross plates Quantity V	5	UGR	<15
Frame Material/color	Metal/White	Beam angel	91.1
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP20	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG LG
Connector	Linect/GST18i3	LED PCB board	12PCS
Cut out hole	CRI	>80
External size	1195x295mm	LM80 8000 hours	97.9(55degrees)
Weight	6.4KGS	L70/B50 hours	YES
Size	1195x295x55mm	IES file available	YES
Box Quantity packaging size	30.5x6.5x12cm	LM79	YES
Quantity for 40"HighCube	2700pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	54~150V


PROSIX 38W LED

This luminaire contains built-in LED lamps.

LED

The LED lamps cannot be changed in the luminaire

874/2012



H[m]	D[m]	Max lux	Med lux	Beta=91.1°	G=0,0 Max not at G
1,00	1,52	2812	1640		
2,00	3,05	703	410		
3,00	4,57	312	182		
4,00	6,10	176	102		
5,00	7,62	112	66		

