




PUREDEE

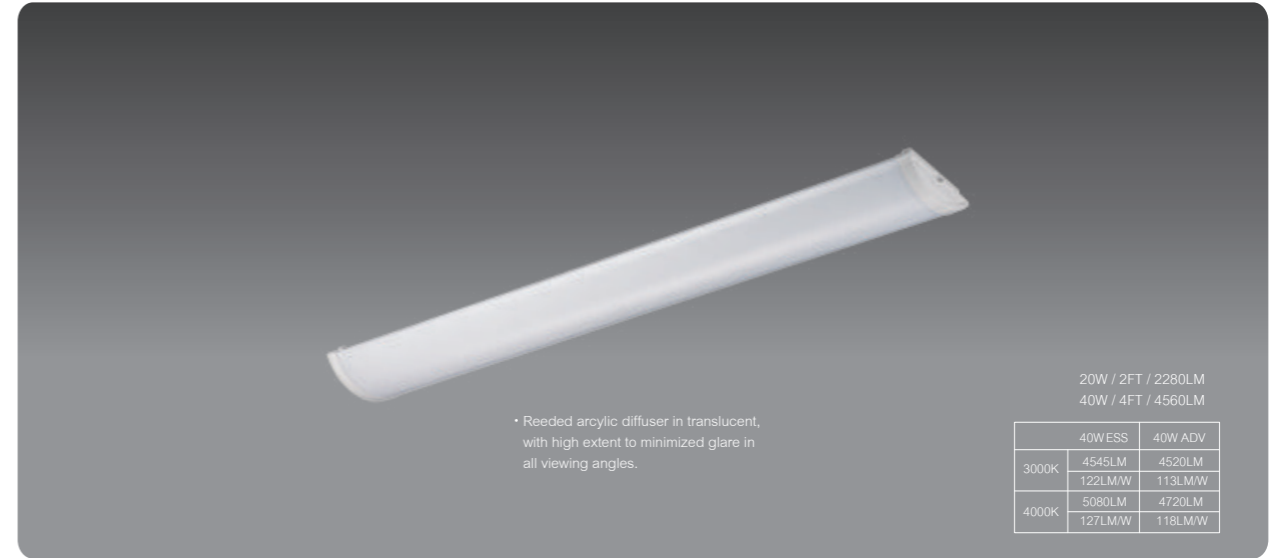

• Reeded acrylic diffuser in translucent, with high extent to minimized glare in all viewing angles.

20W / 2FT / 2280LM
40W / 4FT / 4560LM


	40W ESS	40W ADV
3000K	4545LM 122LM/W	4520LM 113LM/W
4000K	5080LM 127LM/W	4720LM 118LM/W

SPECIFICATION	DATA		
Material and thickness	Cold roll steel 0.8mm	System power	40W
Diffuser Material	PMMA	Total Lumen	5080LM
Reflector/purity	System efficiency	127LM/W
Cross plates Quantity V	0	UGR	<20
Frame Material/color	Metal/White	Beam angel	119.8
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP40	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG LG
Connector	LED PCB board	4PCS
Cut out hole	CRI	>80
External size	1190x165mm	LM80 8000 hours	97.9(55degrees)
Weight	2.13KGS	L70/B50 hours	YES
Size	1190x165x85mm	IES file available	YES
Box Quantity packaging size	122x37x31cm 6pcs	LM79	YES
Quantity for 40*HighCube	2800pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	54~150V

PUREDEE 40W LED







This luminaire contains built-in LED lamps.





LED


The LED lamps cannot be changed in the luminaire

874/2012




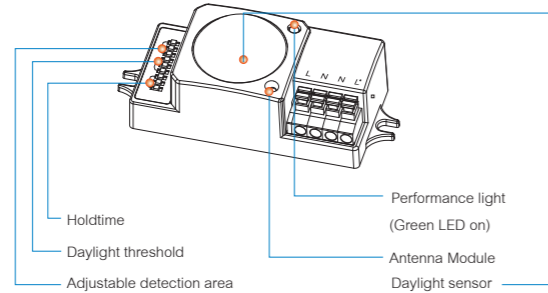


Wall mounting pattern(Unit:m)
Suggested installation height:1-1.8mm




Ceiling mounting pattern(Unit:m)
Suggested installation height:2.5-6mm




With sufficient natural light, the light does not switch on when presence detected.



With sufficient natural light, the sensor switches on the light automatically when person enters the room



People left, light dims to 10%-50%(optional) stand-by level after the hold-time



Light switches off automatically after the stand-by period elapsed.

