





Surface mounted  
Recessed  
Suspend




High quality raster with optical lens optimized light output



Ideal UGR control solution

# TRILED

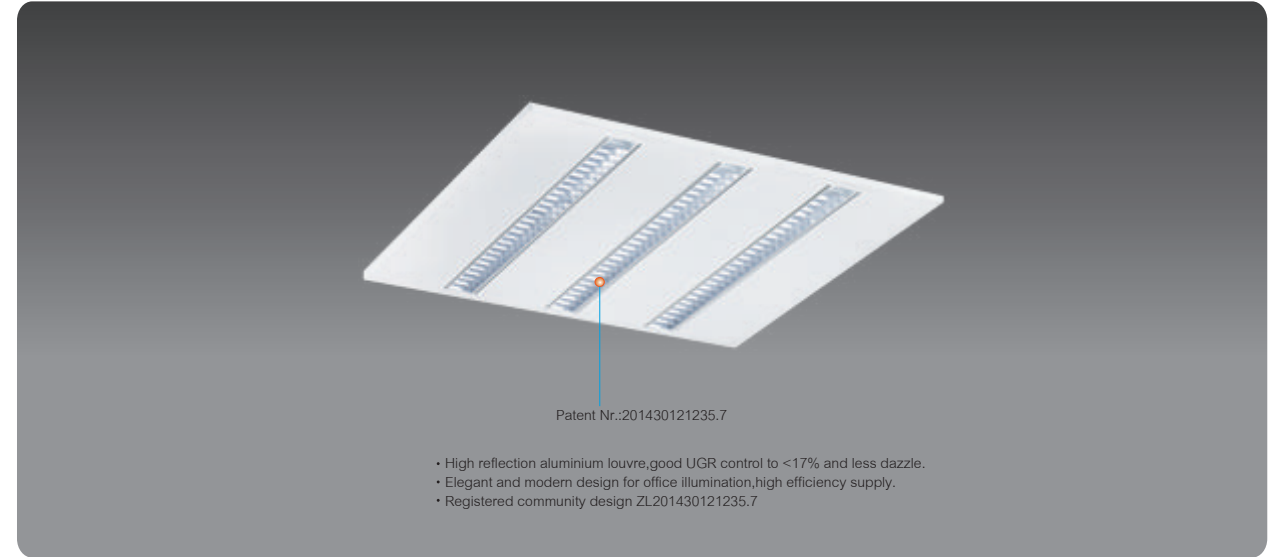

- High reflection aluminium louvre, good UGR control to <17% and less dazzle.
- Elegant and modern design for office illumination, high efficiency supply.
- Registered community design ZL201430121235.7

SPECIFICATION		DATA	
Material and thickness	Cold roll steel 0.8mm	System power	50W
Diffuser Material	Polycarbonate	Total Lumen	5290LM
Reflector/purity	98%CHINESE	System efficiency	96LM/W
Cross plates Quantity V	21	UGR	<13
Frame Material/color	Metal/White	Beam angle	86
Certificates	CE RoHS EN62471	Driver brand	TRIDONIC/OSRAM/PHILIPS
Class	I	Dimmable	AVAILABLE
IP	IP20	PF	>0.96
Warranty	5 YEARS	THD	<20%
IK	IK05(0.7J)	Flicker free	<10%
Glow wires	850 Degrees	LED Chip brand	SAMSUNG LG
Connector	Linect/GST18i3	LED PCB board	3PCS
Cut out hole	570x570mm	CRI	>80
External size	595x595mm	LM80 8000 hours	97.9(55degrees)
Weight	6.4KGS	L70/B50 hours	YES
Size	595x595x40mm	IES file available	YES
Box Quantity packaging size	62x61x5cm	LM79	YES
Quantity for 40"HighCube	3000pcs	Low Color Tolerance	ANSI/MacAdam 3
		DC Voltage range	54~150V

TRILED 50W LED

This luminaire contains built-in LED lamps.

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

**LED**

The LED lamps cannot be changed in the luminaire

874/2012

