




EcoWhite™

LED Downlight Systems
High Quality
5 Years Guarantee



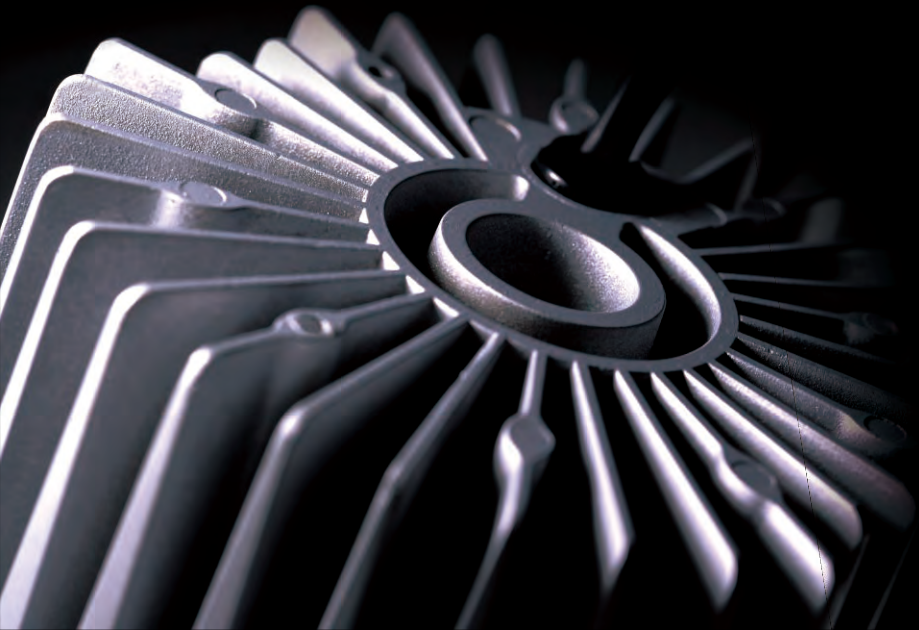

Function

- IP40 after installation. Protect LED from dust in application space .
- Thermally engineered heatsink is robust and offers cooler operation.
- Interchangeable mounting rings.
- Easy to install with mounting clips.
- High grade diffuser provides uniform light .
- Glareless reflector creates visual comfort, cut-off angle is more than 25°.



- Ambient operating temperature: -20°C~+40°C
- Storage temperature: -30°C~+60°C

LED Driver

External Driver (CE/CB/SAA certificated)
Non-Dim: standard
Phase Dim: optional
1-10V /Touch /DALI Dim: on project request

Mounting ring color



Ani-glare
reflector with
high quality
diffuser delivers
visual comfort
light



E3D

E4D

E6D

E8D


Function

- IP65 after installation. Protect LED from dust and moisture in application space.
- Thermally engineered heatsink is robust and offers cooler operation.
- Interchangeable mounting rings.
- Easy to install with mounting clips.
- High quality CITIZEN COB inside with high performance.
- Big cut-off reflector creates visual comfort, and generates medium beam, glare cut-off angle 40°.



- Ambient operating temperature: -20°C~+40°C
 - Storage temperature: -30°C~+60°C

Optic reflector creates highlight effect as well as low glare light

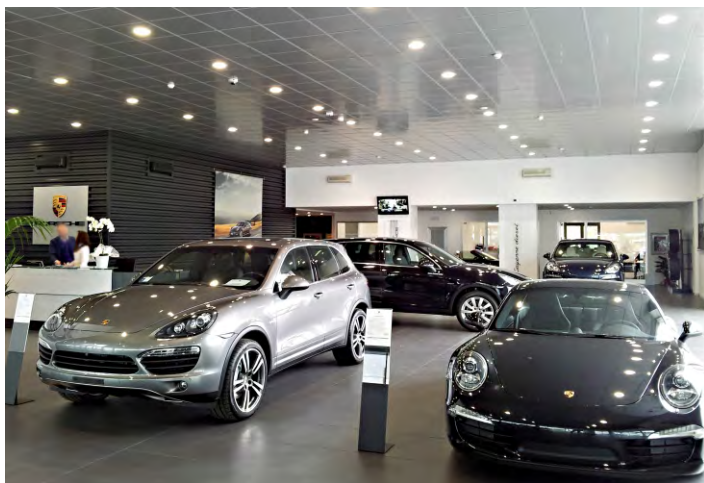

LED Driver

External Driver (CE/CB/SAA certificated)
 Non-Dim: standard
 Phase Dim: optional
 1-10V /Touch /DALI Dim: on project request

Mounting ring color



- White (standard)
- Black
- Gray