




EcoWhite™

LED Downlight Systems
High Quality
5 Years Guarantee



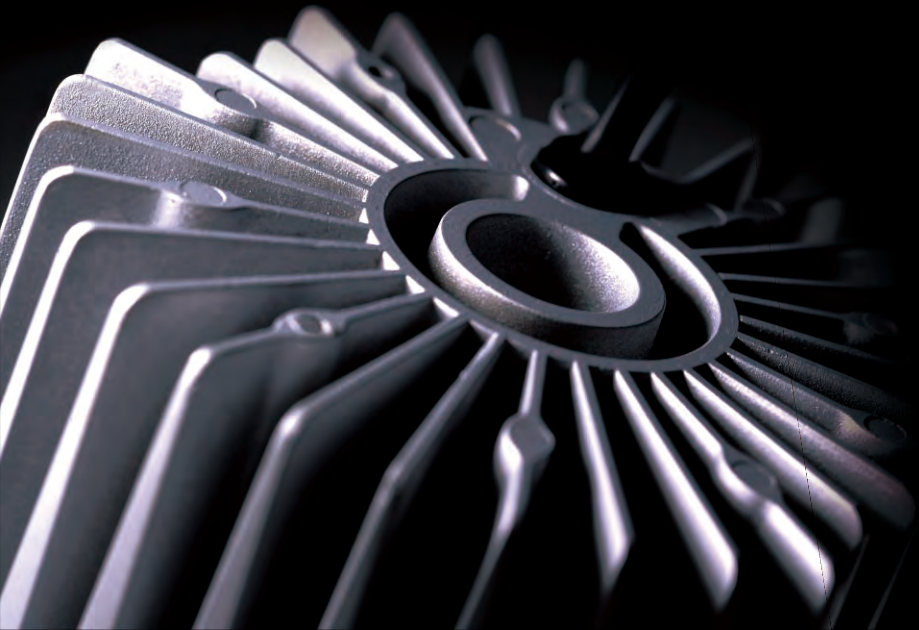

E3D

E4D

E6D

E8D


Function

- IP65 after installation. Protect LED from dust and moisture in application space.
- Thermally engineered heatsink is robust and offers cooler operation.
- Interchangeable mounting rings.
- Easy to install with mounting clips.
- High quality CITIZEN COB inside with high performance.
- Big cut-off reflector creates visual comfort, and generates medium beam, glare cut-off angle 40°.



- Ambient operating temperature: -20°C~+40°C
 - Storage temperature: -30°C~+60°C

Optic reflector creates highlight effect as well as low glare light

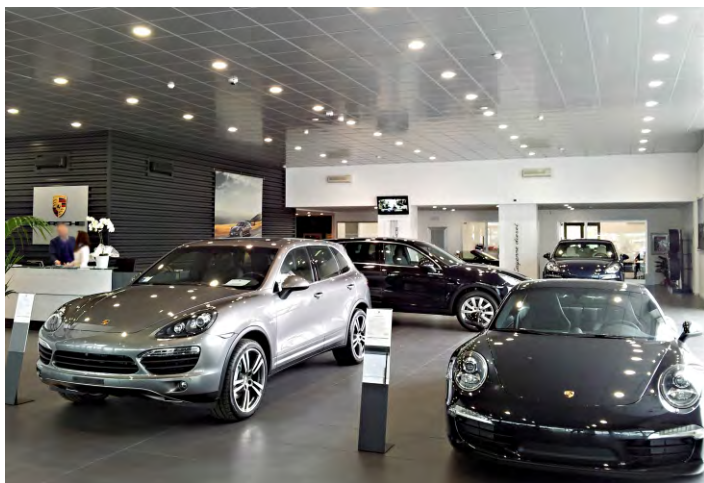


LED Driver

External Driver (CE/CB/SAA certificated)
 Non-Dim: standard
 Phase Dim: optional
 1-10V /Touch /DALI Dim: on project request

Mounting ring color




- White (standard)
- Black
- Gray



E3D

3000K
(Standard)

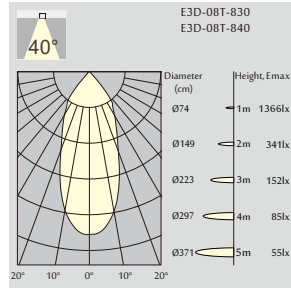


NEW

Order Information



E3D-08T 900 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E3D-08T-830	1100 lm	900 lm	9.5 W	12 W	83	3000K
E3D-08T-840	1200 lm	950 lm	9.5 W	12 W	83	4000K



E6D

3000K
(Standard)

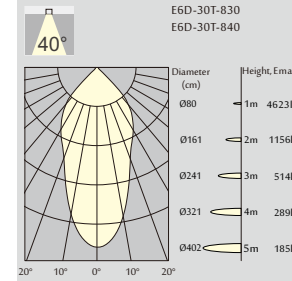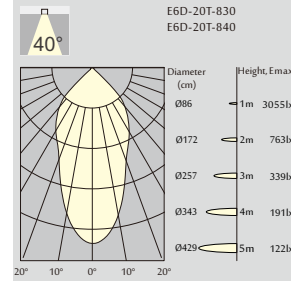


Order Information

E6D-20T 2000 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E6D-20T-830	3200 lm	2600 lm	25 W	28 W	83	3000K
E6D-20T-840	3400 lm	2800 lm	25 W	28 W	83	4000K



E6D-30T 3000 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E6D-30T-830	4600 lm	3700 lm	38 W	42 W	83	3000K
E6D-30T-840	4800 lm	3900 lm	38 W	42 W	83	4000K



E4D


3000K
(Standard)

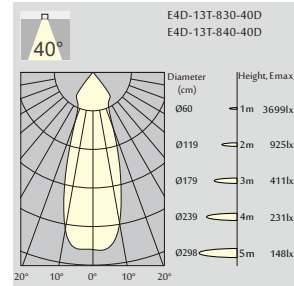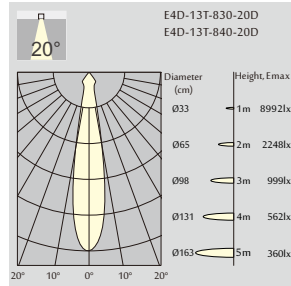

Order Information




E4D-13T 1500 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E4D-13T-830-20	2100 lm	1700 lm	18 W	21 W	83	3000K
E4D-13T-840-20	2300 lm	1800 lm	18 W	21 W	83	4000K
E4D-13T-830-40	2100 lm	1700 lm	18 W	21 W	83	3000K
E4D-13T-840-40	2300 lm	1800 lm	18 W	21 W	83	4000K



E8D

3000K
(Standard)

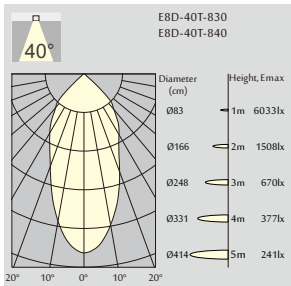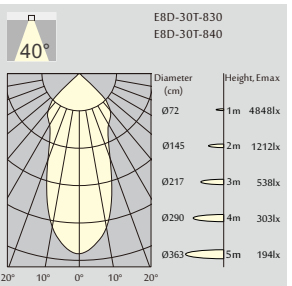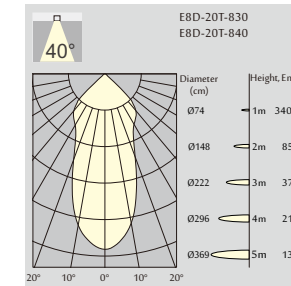

Order Information

E8D-20T 2000 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E8D-20T-830	3300 lm	2700 lm	25 W	28 W	83	3000K
E8D-20T-840	3500 lm	2900 lm	25 W	28 W	83	4000K

E8D-30T 3000 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E8D-30T-830	4700 lm	3800 lm	38 W	42 W	83	3000K
E8D-30T-840	4900 lm	4000 lm	38 W	42 W	83	4000K

E8D-40T 5000 Lm MODELS (White trim, CITIZEN LED)

Code	LED output	Downlight output	LED Power	System Power	CRI	CCT
E8D-40T-830	6300 lm	5100 lm	52 W	56 W	83	3000K
E8D-40T-840	6600 lm	5400 lm	52 W	56 W	83	4000K