


Curved Profile Square LED Pendant Light

Product Parameters	
Input Voltage	: AC100-277V / AC220-240V,50-60HZ
Material	: 6063 Aluminium Profile + Opal Diffuser
Profile Size	: W60*H80mm
Size Option	: 0.45x0.45m / 0.6x0.6m / 0.8x0.8m / 1.0x1.0m / 1.5x1.5m / 2.0x2.0m / 2.4x2.4m / 3.0x3.0m / 3.6x3.6m
Driver	: Constant current LED driver
Emitting Color Option	: 3000K / 4000K / 6000K / Red / Blue / Green / Yellow / Pink / RGB
Luminous Flux	: 100-110Lm/W
CRI	: >80Ra
PF	: >0.90
Flicker Free	: Yes
Beam Angle	: 120°
Function Option	: ON&OFF / 0-10V Dimming / Triac Dimming / DALI Dimming
Installation Option	: Suspension Mount / Ceiling Surface Mount / Wall Mount / Trimless Recessed Mount
Finish Color	: Black / White
IP Grade	: IP20

W60*H80mm Direct Series	Model	Watt	Lumens	CCT	Product Size	Profile Size	Finish Color
	NL-HXZFX6080-45	36W	3600Lm	3000K/4000K/6000K	0.45x0.45 meter	W60*H80mm	Black / White
	NL-HXZFX6080-60	48W	4800Lm	3000K/4000K/6000K	0.6x0.6 meter	W60*H80mm	Black / White
	NL-HXZFX6080-80	64W	6400Lm	3000K/4000K/6000K	0.8x0.8 meter	W60*H80mm	Black / White
	NL-HXZFX6080-100	80W	8000Lm	3000K/4000K/6000K	1.0x1.0 meter	W60*H80mm	Black / White
	NL-HXZFX6080-150	120W	12000Lm	3000K/4000K/6000K	1.5x1.5 meter	W60*H80mm	Black / White
	NL-HXZFX6080-200	160W	16000Lm	3000K/4000K/6000K	2.0x2.0 meter	W60*H80mm	Black / White
	NL-HXZFX6080-240	192W	19200Lm	3000K/4000K/6000K	2.4x2.4 meter	W60*H80mm	Black / White
	NL-HXZFX6080-300	240W	24000Lm	3000K/4000K/6000K	3.0x3.0 meter	W60*H80mm	Black / White
	NL-HXZFX6080-360	288W	28800Lm	3000K/4000K/6000K	3.6x3.6 meter	W60*H80mm	Black / White

Product Size

* Side Length : 0.45x0.45m / 0.6x0.6m / 0.8x0.8m / 1.0x1.0m / 1.5x1.5m / 2.0x2.0m / 2.4x2.4m / 3.0x3.0m / 3.6x3.6m
* Customized length available.

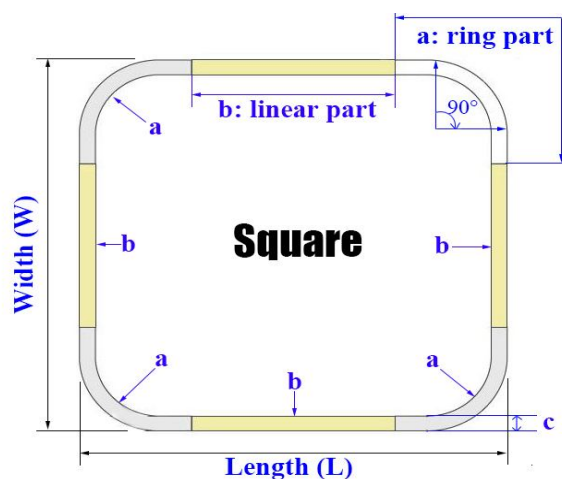

L: Square Length
W: Square Width

a: ring part
b: linear part
c: PMMA diffuser width

Feature


- * Extruded aluminium profile.
- * Clip-in opal diffuser.
- * High lumens LED board.
- * Wide-beam light distribution.
- * Range of length options,OEM available.

Control

- * ON/OFF
- * 0-10V dimming
- * Triac dimming
- * DALI dimming

Installation Method

* Suspension Mount / Ceiling Surface Mount / Wall Mount / Trimless Recessed Mount

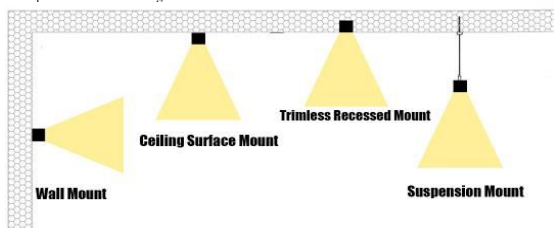

LED Chip

- * SMD2835
- * Luminous Flux: 110Lm/W
- * CRI>80Ra (90Ra available)





Finish Color Option

- * Standard finish color: black, white.
- * Customized color: red, green, blue, pink, yellow, gold, silver





Color Temperature

- * 3000K/4000K/6000K
- * Red/ Green/Blue/Pink/Yellow available



Product Details

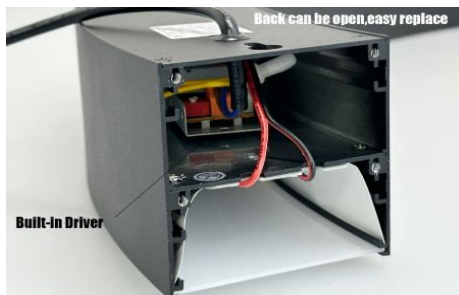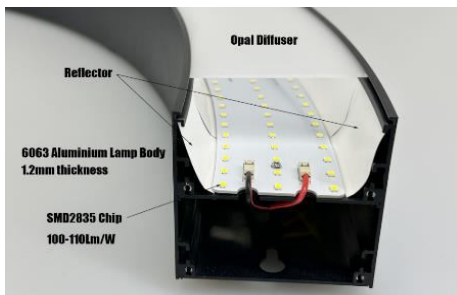

Application

- * Hospital, Gym, Theater, Cinema, Exhibition Hall, Museum, Video Game Room.
- * Hotel, Restaurant, Supermarket, Station, Airport, Cafe Shop, Bar, Club.
- * Living Room, Bedroom, Conference Room, Office, Corridor, Lobby, etc.

