

Fire Testing



I-Joists

Timber Engineered I-Joists, sometimes known as I-Beams, are comprised of a top and bottom timber flange combined with a tall vertical OSB (Oriented Strand Board).



Solid Timber Joists

Softwood joists are ideal for smaller projects, such as extensions, small dwellings or where relatively short spans are involved.




Joist Compliant

Fire Rated Downlights






ND302 Fire rated downlight

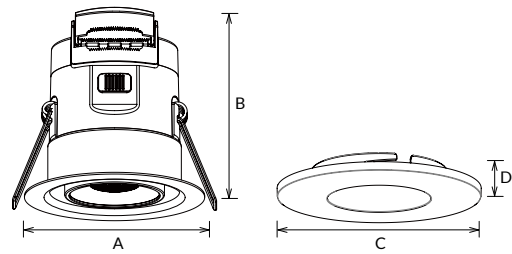

ND302 is IP65 freproof SMD downlight. White, chrome and nickel brushed cover is replaceable, and interchangeable CCT help to release your stock. Quick connector on back side makes quick installation.

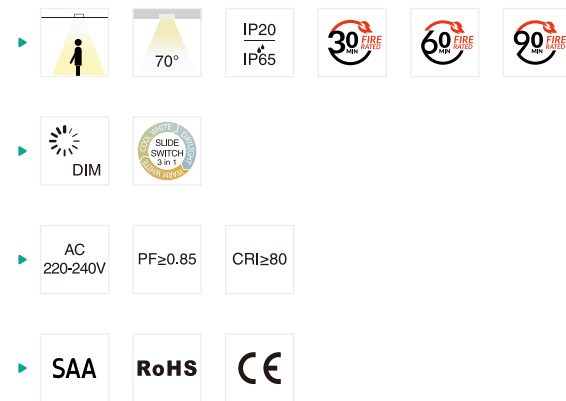

Code	Watt	Size(AxB/CxDmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ND302-5W	5W	Ø85x74	Ø70	600lm	0.17	60PCS
ND302-7W	7W	Ø85x81	Ø70	800lm	0.19	60PCS
ND302-Lamp Cover	/	Ø85x12.5	/	/	0.05	150PCS


CCT ——— 3000K 4000K 5000K 5700K

Ring ——— Nickel White Silver


Trim ——— White



NC145 Fire rated downlight

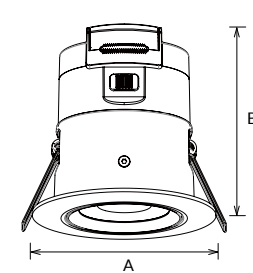

NC145 is freproof SMD downlight with high lumen efficiency 116lm/W. It is designed with gyro design in all direction 360°. Quick connector on back side makes quick installation. White, chrome and nickel brushed color fnishing for frame is achievable.

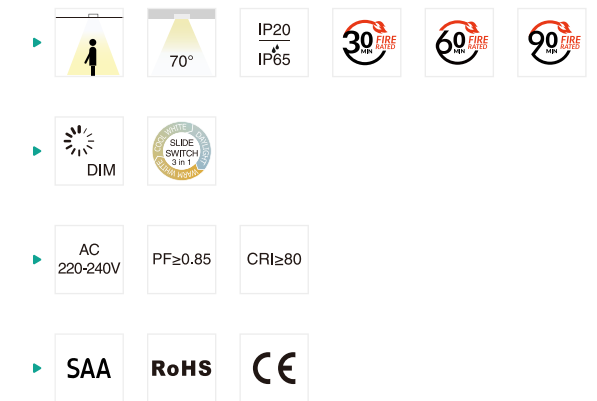

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NC145-7W	7W	Ø95x96	Ø80	830lm	0.35	40PCS

CCT ——— 3000K 4000K 5000K 5700K

Trim ——— White Chrome Nickel Brushed