



E5 Series LED Bollard

Family Model
BLE51026A0B
BLE52026A0B



Product Features:

Contemporary round, flat top bollard, 800mm and 1000mm two optional heights.

Surface anti-aging electrostatic spray processing.

Heavy wall extruded aluminum housing with cast aluminum top cap. Cast aluminum base plate.


IP65 rating ensures no water will ever get inside the fixture.

IK08 rated.

Product Information

Part Number	Description
BLE51026A0B	Aluminum housing, D168*H800mm, 26W, 2085lm, 120°, 4000k, 100-240VAC, IP65
BLE52026A0B	Aluminum housing, D168*H1000mm, 26W, 2085lm, 120°, 4000k, 100-240VAC, IP65

Line Drawing

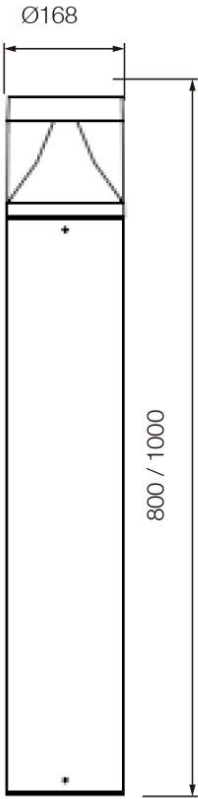

Product Specifications

PHYSICAL SPECIFICATION

Diameter	168 mm	168 mm
Height	800 mm	1000 mm
Housing	Aluminum	
Finish Color	Black	

ELECTRICAL SPECIFICATION

Input Voltage	100-240 VAC	
Frequency	50-60 HZ	
Power Consumption	26 W	26 W
Power Factor	>0.9	

OPTICAL SPECIFICATION

Light Source	SMD LEDs	
Lumens	2485 lm	2485 lm
Luminous Efficacy	90 lm/W	90 lm/W
Color Temperature	3000/4000/5000/6000 K	
Color Rendering Index	>80	
Lumen Maintenance(2000h)	>98%	
Beam Angle	120°	
Average Life	50,000 hrs	

PACKAGING SPECIFICATION

Net Weight	5.0 Kg	5.6 Kg
Carton Quantity	1 Pcs	1 Pcs
Carton Size	185*185*820 mm	185*185*1020 mm
Gross Weight	5.6 Kg	6.0 Kg

OTHERS

IP Rate	IP 65	
IK Rate	IK 08	
Operating Temperature	-20~45℃	
Certification	ETL/CE/RoHS	
Warranty	3 years	