

نور عمان



NOOROMAN



CORO

External LED Bulkhead

SPECIFICATION

Ceiling/ Wall Mount Outdoor Bulkhead Light




Features

1. Round fixture with milky glass diffuser.
2. Long lifetime of 50,000 hours.
3. CCT: 3000K, 4000K.
4. Built-in LED driver.
5. Lumen Maintenance.
6. SMD-DOB module with CRI > 80.
7. Triac dimmable, color changeable and Emergency functions available.
8. High ingress protection rating IP66.
9. Silicon gasket for high ingress protection & high temperature resistance.

Application

Suitable for outdoor applications where long lasting high ingress protection IP66 required.



Product Design

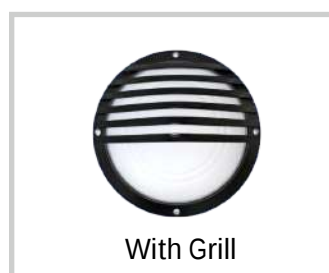

Technical Data Sheet

Model. No.	Power	Luminance Flux	Lm/W	CCT	Weight
NCR15LED2830-BL	15W	1200lm	80lm/W	3000K	1.0kg
NCR15LED2840-BL	15W	1430lm	95lm/W	4000K	1.5kg
NCR15LED1830G-BL	15W	1020lm	68lm/W	3000K	1.2kg
NCR15LED1840G-BL	15W	1130lm	75lm/W	4000K	1.6kg

Measurement

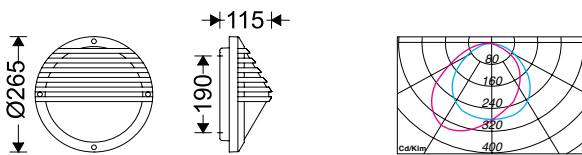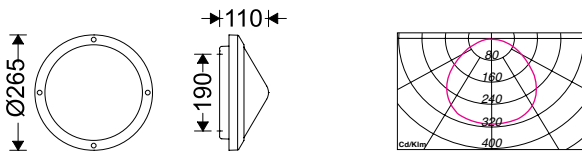

Mounting options

- ☐ Surface mounting
- ☐ Wall mounting



High ingress protection (IP66) due to the safe connection of body and diffuser with silicon gasket