



نور عمان



NOOROMAN


High Luminance
LED Inground Light

IP-67


Beam Angle Adjustable
Inground Light




ITEM	NB2FFR0956
LIGHT SOURCE	9×1.2W OSRAM
LENS	B17
SELECTED DEGREE(°)Ø1/2	20°
INPUT VOLTAGE(V)	DC 24 120 240
OPERATING CURRENT(MA)	DC 24=500 120=112 240=64
CONSUMPTION(W)	DC 24=12 120=13.2 240=13.2
LUMINANCE(LM)	CW=1090 WW=756
IK	10




ITEM	NB2GFR1257
LIGHT SOURCE	12×1.5W OSRAM
LENS	B26, B27, B45
SELECTED DEGREE(°)Ø1/2	15°
INPUT VOLTAGE(V)	DC 24 120 240
OPERATING CURRENT(MA)	DC 24=1020 120=151 240=82
CONSUMPTION(W)	DC 24=24.5 120=18.2 240=18.2
LUMINANCE(LM)	CW=1885 WW=1389
IK	10

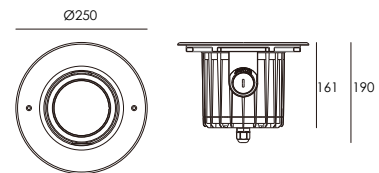

ITEM	NB2KFR1258
LIGHT SOURCE	12×2.2W NICHIA
LENS	B26, B27, B45
SELECTED DEGREE(°)Ø1/2	15°
INPUT VOLTAGE(V)	DC 24 120 240
OPERATING CURRENT(MA)	DC 24=1150 120=234 240=125
CONSUMPTION(W)	DC 24=27.6 120=28 240=28
LUMINANCE(LM)	WW=2392
IK	10


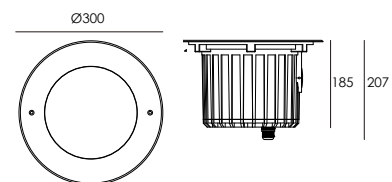


WATER PROOF SOLUTION


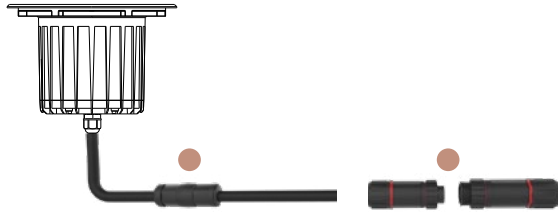


- Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



SLEEVE(Included)



NB2FFR0956
Recessed Sleeve 067



NB2GFR1257
Recessed Sleeve 068



NB2KFR1258
Recessed Sleeve 106

HOUSING	12# Die-casting aluminum dark grey powder coated T=60-80µm Adhesion of ISO class 1/ATM class 4B
FRONT COVER	Hard chrome-plated stainless steel SUS 316L#
LIGHT WINDOW	NB2FFR0956: Tempered step glass.T=8mm NB2GFR1257: Tempered step glass.T=10mm NB2KFR1258: Tempered step glass.T=10mm
GLASS PRESSURE CAPACITY	NB2FFR0956: Full Area=2,961kgs NB2GFR1257: Full Area=5,513kgs NB2KFR1258: Full Area=5,356kgs
CABLE GLAND	NB2FFR0956: IP68 PG-11 PA66 NB2GFR1257: IP68 PG-13.5 PA66 NB2KFR1258: IP68 PG-13.5 PA66
GASKET	Silicon rubber molding shaped seal
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~50°C
POWER CABLE	Outside of luminaire NB2FFR0956: 12V/24V: H07RN-F 2×1.0mm², L=0.5m 120V/240V: H07RN-F 3×1.0mm², L=0.5m NB2GFR1257, NB2KFR1258: 12V/24V: H07RN-F 2×1.0mm², L=0.5m 120V/240V: H07RN-F 3×1.0mm², L=0.5m
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized
RECESSED SLEEVE MATERIAL	PC/ABS ALLOYS

OPTICS

Referenced Degree(°)91/2

	B17	15°	20°	30°	45°
	B26	8°			
	B27	15°	25°	30°	
	B45	10°×60°	10°	20°	50°

HONEYCOMB LOUVER (Option)

NB2FFR0956



Louver Mh003



NB2GFR1257



Louver Mh004



NB2KFR1258



Louver Mh004



- Optional Accessory Honeycomb Louver.
- The measured luminous flux data does not contain the honeycomb, and the data containing is reduced 20 to 30%.

PHOTOMETRIC

