




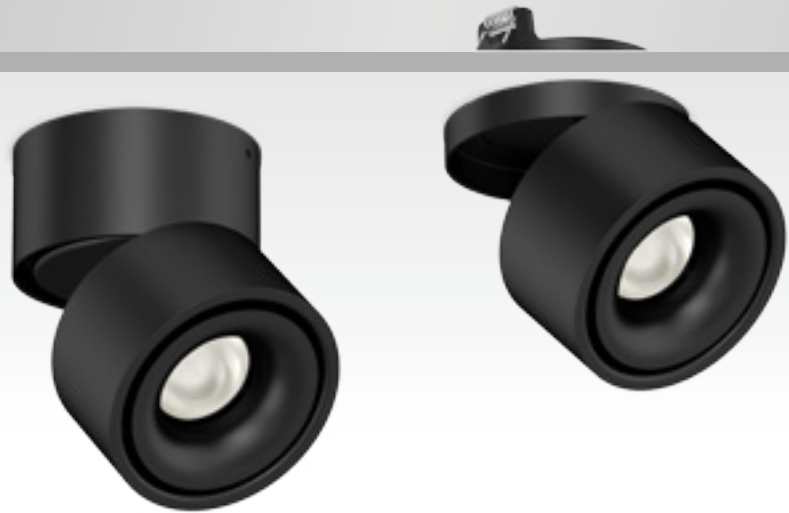

ND340 Downlight



ND340 is LED spot available in 2 installation types , ND340A - surface mounted with head of 90 degree adjustable on vertical and 320 degree on horizontal, ND340B - recessed type with head of 80 degree adjustable on vertical and 320 degree on horizontal. Both adopt high quality COB LED, PC diffuser and PMMA lens for uniform beam. ND340A comes with internal flicker-free non-dim driver only , ND340B can come with external flicker-free non-dim , triac dim or Dali driver. 3CCT changeable for option , IP40 for indoor use only.

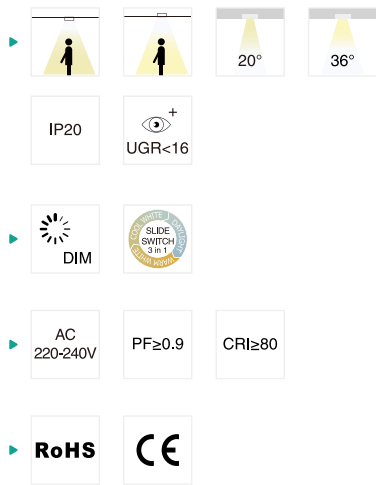


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ND340A-10W/C3	10W	Ø100x108	/	1100lm/900lm	0.50	24PCS
ND340A-15W/C3	15W	Ø100x108	/	1550lm/1250lm	0.54	24PCS
ND340B-10W/C3	10W	Ø100x100	Ø85-95	1100lm/900lm	0.44	24PCS
ND340B-10W-D	10W	Ø100x100	Ø85-95	1050lm	0.47	24PCS
ND340B-10W-P3	10W	Ø100x100	Ø85-95	900lm	0.48	24PCS
ND340B-15W/C3	15W	Ø100x100	Ø85-95	1550lm/1250lm	0.44	24PCS
ND340B-15W-D	15W	Ø100x100	Ø85-95	1500lm	0.53	24PCS
ND340B-15W-P3	15W	Ø100x100	Ø85-95	1250lm	0.54	24PCS


CCT ——— 2700K 3000K 4000K 5000K Trim ——— White Black



NT340 Track light



NT340 is LED spot with head of 90 degree adjustable on vertical and 320 degree on horizontal. It adopts high quality COB LED, PC diffuser and PMMA lens for uniform beam. Comes with internal flicker-free non-dim driver only . 3CCT changeable for option , IP40 for indoor use only.

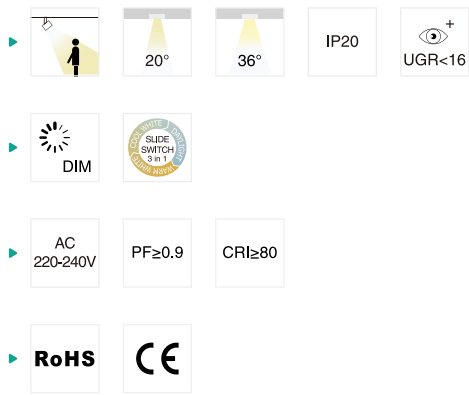

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NT340A-10W	10W	Ø100x166	1100lm	0.58	24PCS
NT340A-10W-C3	10W	Ø100x166	900lm	0.59	24PCS
NT340A-15W	15W	Ø100x166	1550lm	0.62	24PCS
NT340A-15W-C3	15W	Ø100x166	1250lm	0.63	24PCS

CCT ——— 2700K 3000K 4000K 5000K Trim ——— White Black