




نور عمان

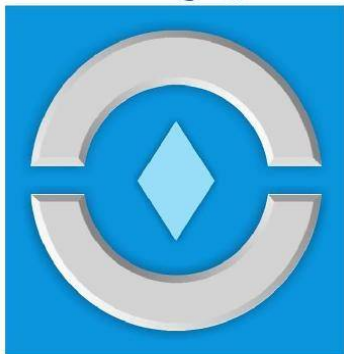

NOOROMAN



Flexi LED Strip



ONE
BIN
ONLY


TECHNICAL DATA

Model	Wattage	2500K	2700K	3000K	4000K	6000K
FLX-48	4.8W	470	480	490	500	520
FLX-72	7.2W	720	730	740	750	760
FLX-96	9.6W	960	970	980	990	1000
FLX-144	14.4W	1440	1450	1460	1470	1480
FLX-192	19.2W	1920	1930	1940	1950	1960




FEATURES

Luminous Efficacy	>500 lm/M
SDCM	< 3
CRI	>83 / 93
Beam Angle	120°
Working Voltage	24 VDC
LED Driver	Remote
Control	Switched / 0-10 / DALI
Body Material	Epoxy IP65, Silicone IP67
Optics	No secondary optics
IP Rating	IP20/IP65/IP67/IP68
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs

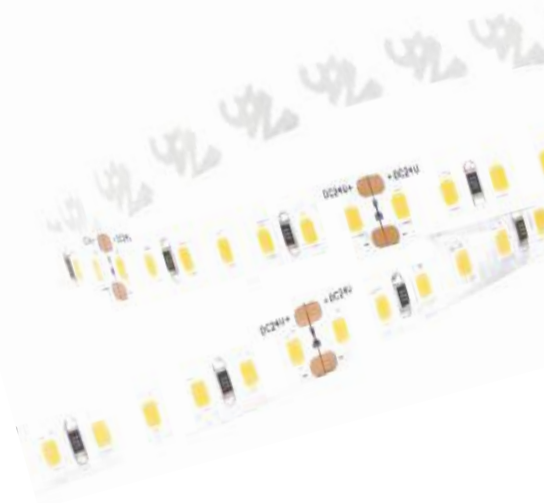

ONE
BIN
ONLY

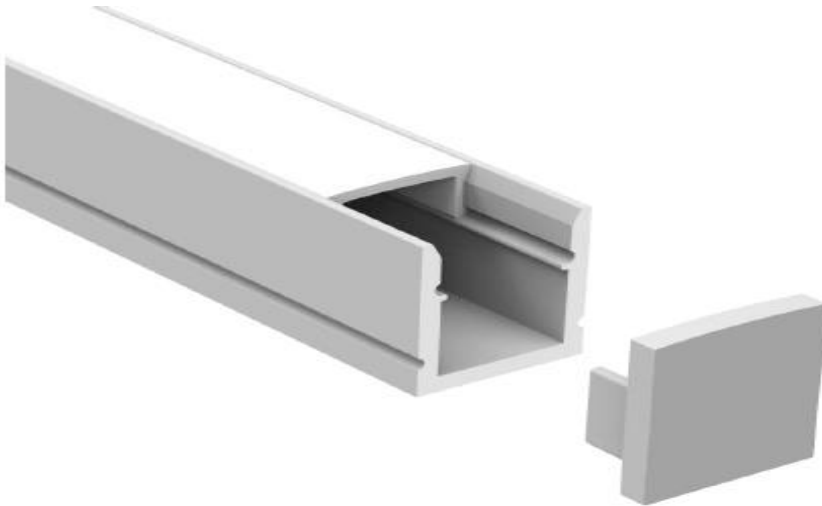

TECHNICAL DETAIL

Description	Material	Code Reference
Aluminium Profile	6063-T5 Aluminium	FLX-EXTRU-CH
Diffuser	OPAL / Clear	FLX-EXTRU-DF
End Cap	Plastic / Aluminium	FLX-EXTRU-EC
Monting Clip	Stainless Steel	FLX-EXTRU-CLP

