




نور عمان

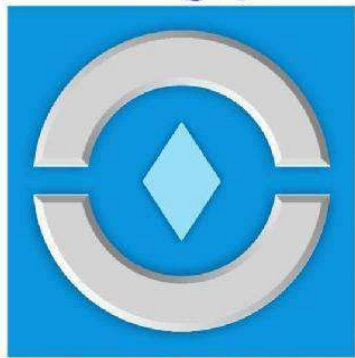

NOOROMAN

LED Downlights

CUBA Series

LED Downlights

CUBA LED Recessed Downlights.

Heat Sink: die-casting aluminum

Surface finish: White powder coating

Light source: CREE COB

Colour rendering index(CRI): >80 (>90 for optional)

Colour temperature(K): 3000K-6000K

Control gear: ON.OFF, flicker free

Protection degree: IP44

Lamp head: Adjustable/Fixed

Mounting: Recessed mounting


Areas of application: interior common areas, boutiques, corridors, entrance halls, hotels, offices, airports and others.



Parameters:

Model	Power	Lumens	Lm/W	CCT	CRI	T ^a Amb	Beam angle	Dimensions - Cut-out
DL-CUBA-5W	5W	490lm	98lm/w	3000-6000K	>80	-40°C +90°C	15°, 24°, 38°, 60°	WØ65xH80mm - Ø55mm
DL-CUBA-8W	8W	790lm	98lm/w	3000-6000K	>80	-40°C +90°C	15°, 24°, 38°, 60°	WØ85xH68.5mm - Ø75mm
DL-CUBA-12W	12W	1180lm	98lm/w	3000-6000K	>80	-40°C +90°C	15°, 24°, 38°, 60°	WØ85xH90mm - Ø75mm
DL-CUBA-15W	15W	1470lm	98lm/w	3000-6000K	>80	-40°C +90°C	15°, 24°, 38°, 60°	WØ110xH98mm - Ø95mm
DL-CUBA-20W	20W	1960lm	98lm/w	3000-6000K	>80	-40°C +90°C	15°, 24°, 38°, 60°	WØ140xH151mm - Ø125mm
DL-CUBA-30W	30W	2940lm	98lm/w	3000-6000K	>80	-40°C +90°C	15°, 24°, 38°, 60°	WØ140xH151mm - Ø125mm

Light source: CREE COB





Good heat dissipation:




Installation:


with Reflector

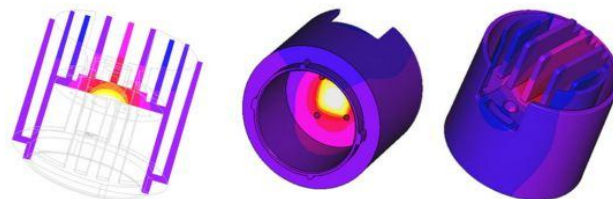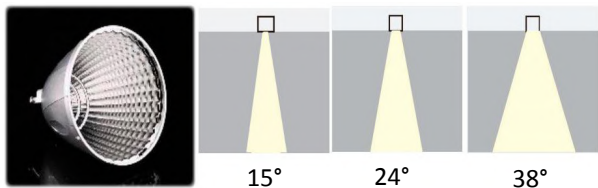

with LENS

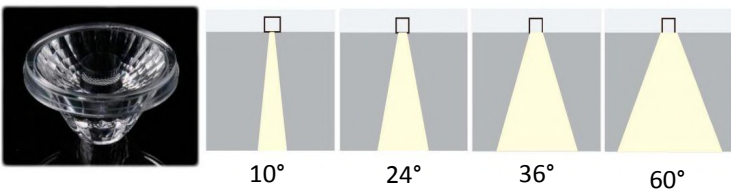

Installation:

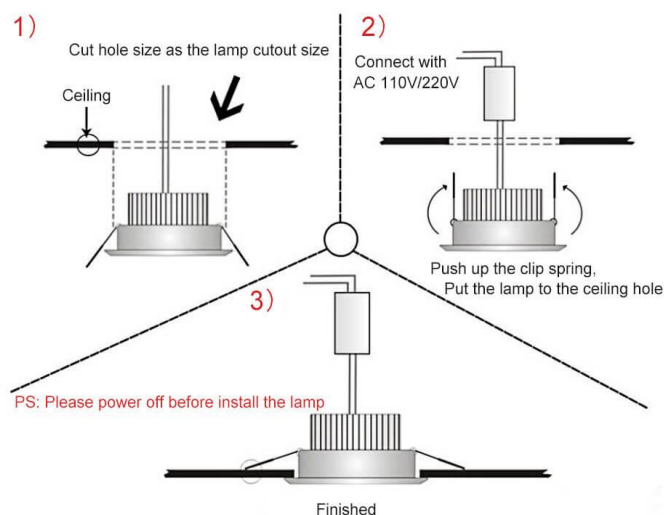

Application:

