


LED POLE LIGHT NBG 43



A/B/C Head

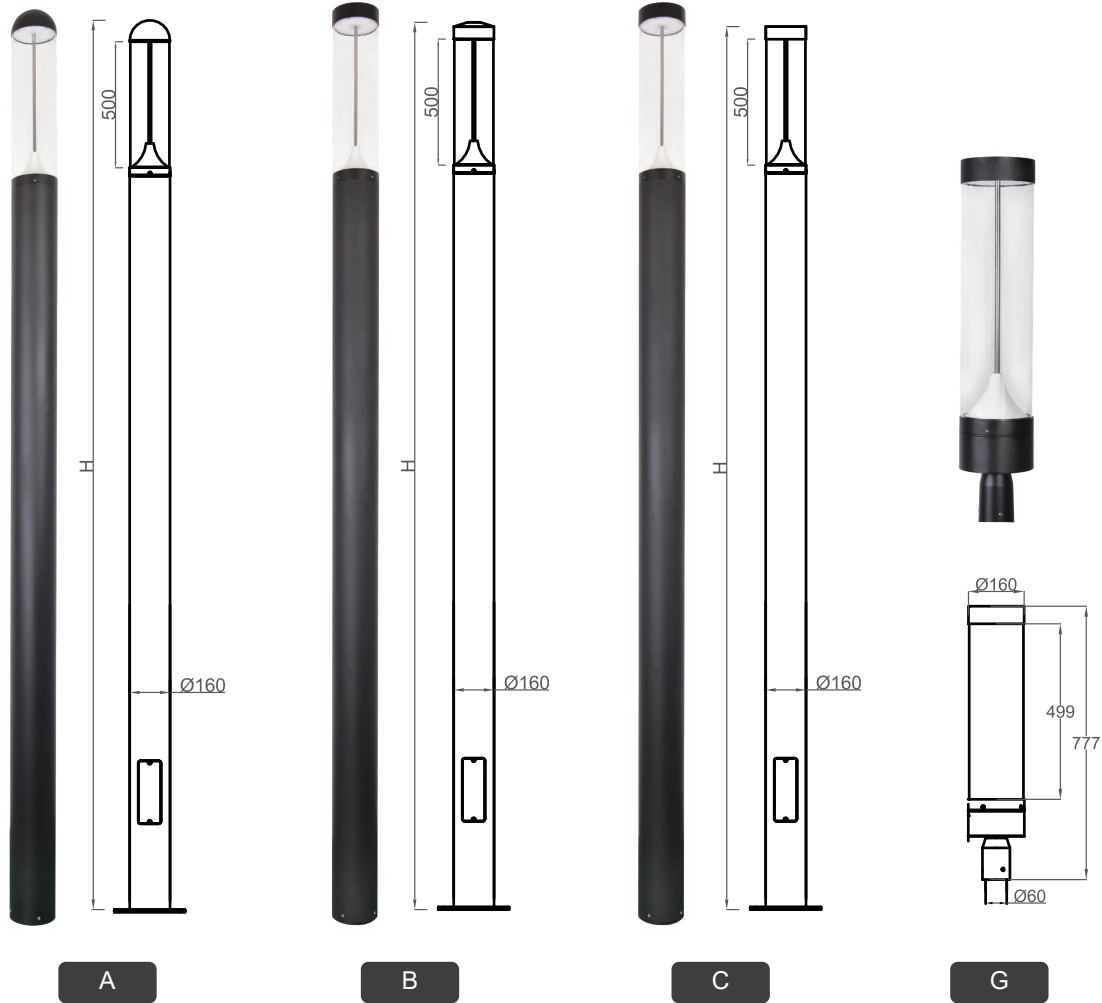

Anti-glare board



Die casting reflector



Die casting heatsink

Application:



Walkways



Parks / Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

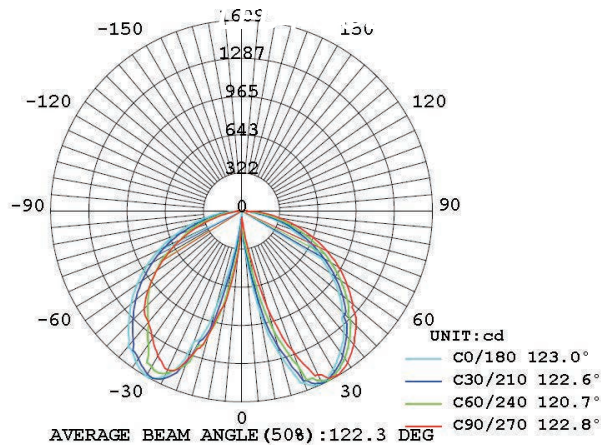

Features:

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy.
- The diffuser is a clear anti-UV PMMA for high efficiency and vandal resistance.
- Lumileds 3030 led chip and Sosen driver as regular, Meanwell, Philips driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

Specification:

Item No.	LED	Lumens	Wattage	CCT	CRI
NBG43-25W	Lumileds 3030	2700Lm	25W	2700-6500K	≥80
NBG43-30W	Lumileds 3030	3145Lm	30W	2700-6500K	≥80
NBG43-40W	Lumileds 3030	4017Lm	40W	2700-6500K	≥80
NBG43-50W	Lumileds 3030	5000Lm	50W	2700-6500K	≥80