

LED BOLLARD NBW42




A



B



C



Breathing apparatus




Die casting heatsink




die casting reflector




Injection PC diffuser

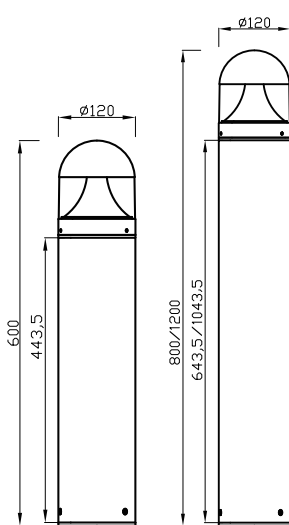


A

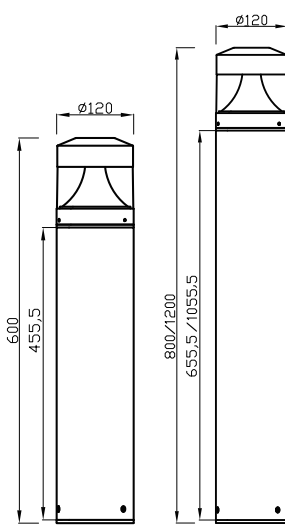

B

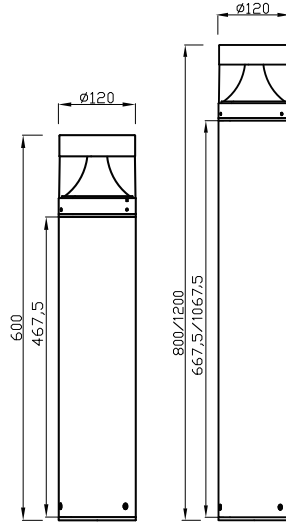

C



Application:



Walkways



Parks / Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

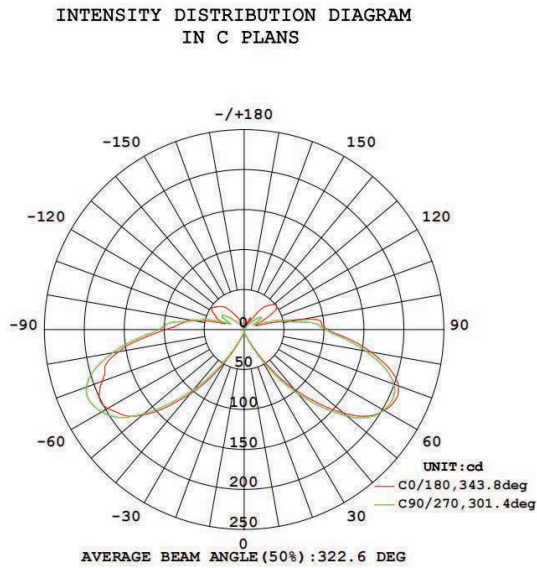

LED BOLLARD



Features:

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy.
- The diffuser is a clear anti-UV injection polycarbonate for high efficiency and vandal resistance.
- With anti-glare plate.
- Lumileds 2835 led chip and Osram driver as regular, Tridonic, Meanwell, Philips driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K, 3 CCT color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.

Specification:

Item No.	LED	Lumens	Wattage	CCT	CRI
NBW42-10W	Lumileds 2835	800 LM	10W	2700-6500K	≥80
NBW42-14W	Lumileds 2835	1200 LM	14W	2700-6500K	≥80