


iLINE

Surface Mount/Suspended
Linear Luminaire

نور عمان



NOOROMAN





iLINE Surface Mount/Suspended Linear Luminaire

Application

Suitable for supermarkets, warehouses, shops, ... applications where symmetrical, asymmetrical, or double asymmetrical lighting is required together with glare control, uniform light distribution, and light direction control.

Technical Data

Body:

- White powder coated high pressure extruded aluminium profiles
- Polycarbonate end-cap.
- PVC profile cover in continuous models

Color temperature:

- 4000K or 6500K

Light distribution:

- High efficacy lensed clear polycarbonate (more than 95%), Narrow 30 degrees, Wide 90 degrees, Asymmetric and Double asymmetric

Clamp Characteristic:

- Safe and reliable stainless steel clamps for tool free installation of the luminaire

Electrical components:

- High power factor electronic constant current driver > 0.9
- High efficacy LED module
- Lumen Maintenance (L70) > 90,000 hrs
- Standard LED module with higher than %80 color rendering index
- Single core solid conductor made of copper with PVC insulation
- 3-pole polycarbonate wire terminals
- Looping system in discontinuous models
- Through wiring system in continuous models

Ordering Options:

- Emergency battery pack in 115cm models



19

Pasta all'uovo
*Egg pasta
Derivati del pane
*Bread substitutes
Riso - Pasta di semola
*Rice - Semolina pasta

21

Pasta di semola
*Semolina pasta

Surface Mount/Suspended Linear Luminaire





Cat. No.		Power Consumption (W)	Luminance Flux (lm)	Efficacy (lm/W)	L (mm)	W (kg)
NL457	[N] 601LED28 [] -W	17	2600	153	600	1.4
NL457	[N] 601LED38 [] -W	25	3600	144	600	1.4
NL457	[N] 1152LED28 [] -W	32	5000	156	1150	2.3
NL457	[N] 1152LED38 [] -W	49	7000	143	1150	2.3
NL457	[N] 1453LED28 [] -W	39	6200	159	1450	2.6
NL457	[N] 1453LED38 [] -W	58	8700	150	1450	2.6
NL457	[N] 1703LED28 [] -W	47	7200	153	1700	3.1
NL457	[W] 601LED28 [] -W	17	2400	141	600	1.4
NL457	[W] 601LED38 [] -W	25	3400	136	600	1.4
NL457	[W] 1152LED28 [] -W	32	4700	147	1150	2.3
NL457	[W] 1152LED38 [] -W	49	6700	137	1150	2.3
NL457	[W] 1453LED28 [] -W	39	6000	154	1450	2.6
NL457	[W] 1453LED38 [] -W	58	8200	141	1450	2.6
NL457	[W] 1703LED28 [] -W	47	7000	149	1700	3.1

★ In continuous versions, NL457 is replaced with NL457S

★ In the table above

40	Color temperature: 4000K
65	Color temperature: 6500K
N	Narrow 30 degrees Light distribution
W	Wide 90 degrees Light distribution

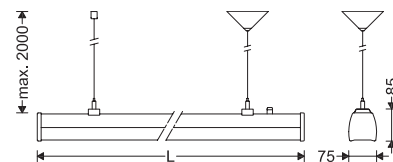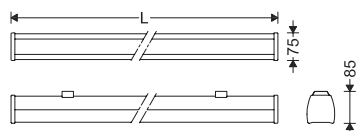

Ordering options:

Emg.pack 1-10 V





Flicker Free

RAL 9016

LED

IP 40

Looping



White body profile with cover in 60, 115, 145 and 170 cm length



White coated end caps for iLINE

Surface Mount/Suspended Linear Luminaire





Cat. No.		Power Consumption (W)	Luminance Flux (lm)	Efficacy (lm/W)	L (mm)	W (kg)
NL457	DA 601LED28 -W	17	2600	153	600	1.4
NL457	DA 601LED38 -W	25	3600	144	600	1.4
NL457	DA 1152LED28 -W	32	5000	156	1150	2.3
NL457	DA 1152LED38 -W	49	7000	143	1150	2.3
NL457	DA 1453LED28 -W	39	6500	167	1450	2.6
NL457	DA 1453LED38 -W	58	9000	155	1450	2.6
NL457	DA 1703LED28 -W	47	7500	160	1700	3.1
NL457	A 601LED28 -W	17	2600	153	600	1.4
NL457	A 601LED38 -W	25	3600	144	600	1.4
NL457	A 1152LED28 -W	32	5000	156	1150	2.3
NL457	A 1152LED38 -W	49	7000	143	1150	2.3
NL457	A 1453LED28 -W	39	6200	159	1450	2.6
NL457	A 1453LED38 -W	58	8700	150	1450	2.6
NL457	A 1703LED28 -W	47	7200	153	1700	3.1

★ In continuous versions, NL457 is replaced with NL457S

★ In the table above

40	Color temperature: 4000K
65	Color temperature: 6500K
A	Asymmetric Light distribution
DA	Double asymmetric Light distribution

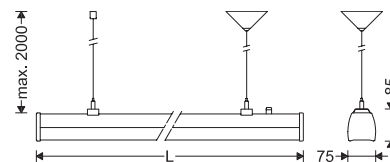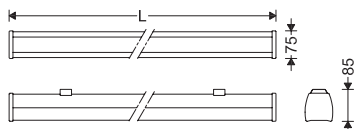

Ordering options:

Emg.pack 1-10 V





Flicker Free

RAL 9016

LED

IP 40

Looping



Please pay attention to the lens installation marking guide when installing NL457A..., (NL457SA...) models to the trunk. It is showing the direction of light distribution.

Accessories



GPC4SS-Bracket, GPC5SS-Bracket & GPC6SS-Bracket

Stainless steel brackets (4, 5 and 6 cm diameter poles)



GPA6-Bracket

Galvanized brackets (6 cm diameter poles)



GPB4-Bracket, GPB5-Bracket

Dacromet coated pole bracket (4 and 5 cm diameter poles)



GDMRC-20

Mounting clamp Rod M10



GWA1-Bracket

Galvanized wall mounting brackets with graded angles



G440KSU

Suspension kit



G440EKSU3-S

Electrical suspension kit with 3-pole special wire terminal in gray color

Mounting Symbols

	Surface mounting
	Suspension
	Wall mounting with bracket
	Pipe clamp mounting



19
Pasta all'uovo
*Egg pasta
Derivati del pane
*Bread substitutes
Riso - Pasta di semola
*Rice - Semolina pasta

21
Pasta di semola
*Semolina pasta

23
Pasta di semola
*Semolina pasta

USCITA DI EMERGENZA

20

Make