





NO-07B LED freestanding luminaire



- Adopts Casambi IoT, Tridonic driver.
- Easy for assembly and maintenance.
- High lighting efficiency, 115lm/W.
- Precise optical design: Direct and indirect lighting, UGR<16, up 75% & down 25% lighting.
- Plug and play, convenient for different position.

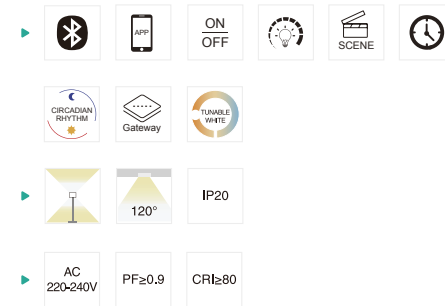


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NO-07B-100W-B-I03	100W	1920x920x300	10800lm	Flat lamp body+Lamp pole:7.20 Lamp base:6.80	3PCS
NO-07B-100W-B-I03	100W	1925x920x300	11800lm	Flat lamp body+Lamp pole:7.20 Lamp base:6.80	3PCS

TW


Finish White



NT228 Track light



- Adopts Casambi IoT.
- Anti-glare design.
- Modular lens design: 24°/36°/60°.
- Flicker free External driver.
- 4 wires with 3-circuit adapter for track installation.

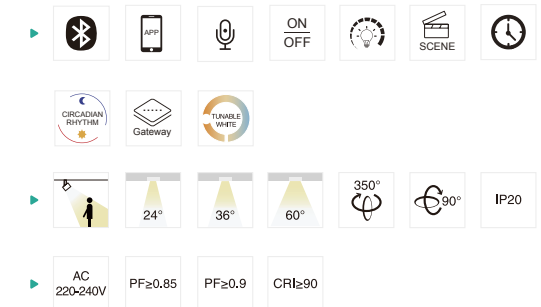

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NT228-10W-B1-I03	10W	Ø65x249	1100lm	0.47	18PCS
NT228-15W-B1-I03	15W	Ø65x249	1550lm	0.47	18PCS
NT228-20W-B1-I03	20W	Ø85x269	2150lm	0.72	12PCS
NT228-25W-B1-I03	25W	Ø85x269	2550lm	0.73	12PCS
NT228-30W-B1-I03	30W	Ø100x302	2900lm	1.00	6PCS

TW

Finish White Black