


LEDSUM

Light Panel

نور عمان

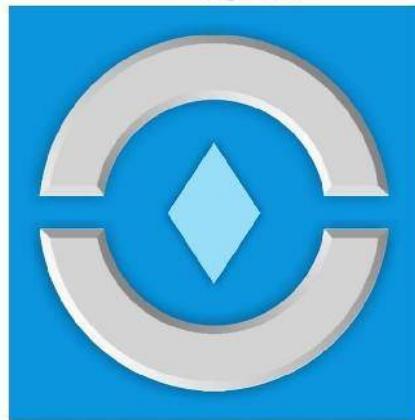

NOOROMAN





LEDSUM

Light Panel

LEDSUM light panel is manufactured by Noor for recessed or surface mounting suitable for modern office and commercial lighting applications. Uniform light distribution, energy saving, glare free, and sleek design are among the highlights of this light panel.

Application

Suitable for modern offices and commercial buildings where uniform light distribution, energy saving, glare control, and aesthetically beautiful design are required such as banks, modern offices, universities, schools, ...

Technical Data

Body:

- Body made of cold rolled steel sheet with polycarbonate rim
- Optional Comfort frame for excellent visual comfort

Diffuser:

- Special Polystyrene diffuser with high light transmission for optimum efficacy and high light source hiding for glare control

Mounting Bracket:

- Specially designed extruded seamless aluminium bracket installed behind the luminaire results in easy installation and aesthetical appearance in LDSM4282LED... models

Electrical Components:

- High quality constant current LED driver (PF > 0.9)
- Standard LED module with CRI > 80
- Standard LED module with high efficacy and life expectancy > 50,000 hrs, L80B20
- Flicker Free
- Single core solid conductor made of copper with PVC insulation
- 3 pole special polycarbonate wire terminals with looping capability

Ordering Options

- Emergency battery pack (in some versions)
- High power factor dimmable electronic driver in 1-10V and DALI models (in some versions)



LEDSUM


Recessed Light Panel



Cat. No.	Power Consumption (W)	Luminance Flux (lm)	Efficacy (lm/W)	Color Temperature (K)	W (kg)
LDSM5282LED2840	37	4500	122	4000	4.3
LDSM5282LED2865	37	4500	122	6500	4.3




M528...



M528...+528SH-W

Ordering options:



RAL 9003




LED

1-10V

Emg.pack

IP44

LOOPING

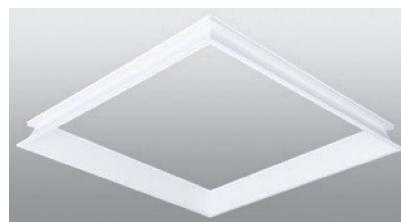

Comfort frame - In Depth for exposed T-Grid false ceilings (optional)

