




نور عمان

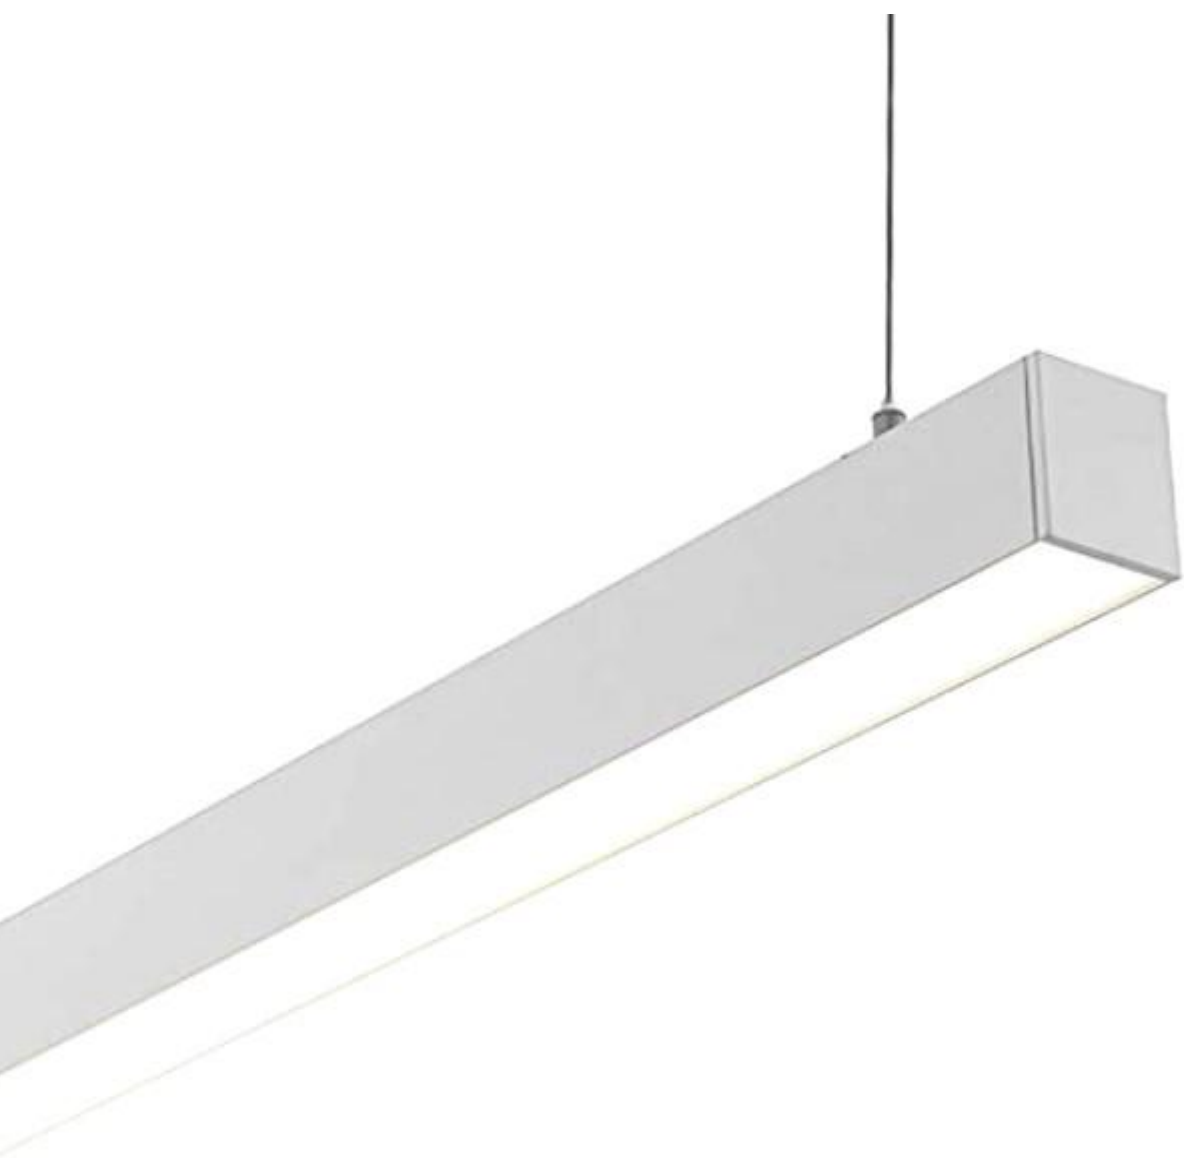


NOOROMAN

MK-PL Series

Suspended Linear Light

Item	Power	CCT	LM/W	Lumen	Finish	Dimensions
MK-PL20W20-990	20W LED	3000K/4000K/5000K/5700K	120	2400lm	RAL9016/RAL9005	L990xW48xH78mm
MK-PL35W35-1120	35W LED	3000K/4000K/5000K/5700K	120	4200lm	RAL9016/RAL9005	L1120xW48xH78mm
MK-PL45W45-1480	45W LED	3000K/4000K/5000K/5700K	120	5400lm	RAL9016/RAL9005	L1480xW48xH78mm
MK-PL50W50-1480	50W LED	3000K/4000K/5000K/5700K	120	6000lm	RAL9016/RAL9005	L1480xW48xH78mm
MK-PL60W60-1970	60W LED	3000K/4000K/5000K/5700K	120	7200lm	RAL9016/RAL9005	L1970xW48xH78mm



*Length can be customized at 2240mm



LIGHT TECHNICAL DATA

Light Source : LED
Light Source Included : Yes
Replaceability : Replaceable LED by professional,
Replaceable Control gear by professional
Colour Rendering Index (Ra) : >80
Colour Consistency (SDCM) : 3
Beam Angle (°) : 120
Light sharing : Symmetric
Light Outlet : Direct
Number of Lamps (pcs) : SMD
High efficacy LED modules
Life Time : L80 B20 50,000h
Emergency: Possible on request

OPERATION AND CONNECTION

Driver Included : Yes
Driver Model : Constant Current Driver
Operating Temperature : -20...+45
Max. Tc (°C) : 65
Dimmable : On-Off / DALI / 0-10V

CONSTRUCTION

Body : Aluminium
Diffuser : Polycarbonate, UV stabilized

TECHNICAL DATA

Voltage Interval (V) : 220...240
Line Frequency (Hz) : 50, 60

ACCESSORIES

Mounting clips
Suspension cable

MEASUREMENT AND INSTALLATION

Operating Environment : Indoor
IP Degree of Protection : IP40, IK07
Installation : Surface mounted / Supended

