



NL127A

NL127B

NL127C

NL127D


NL127

BEDSIDE LAMP WITH
DIFFERENT DESIGNS

TECHNICAL

Materials of Optics	PS/PC
Materials of Housing	Aluminium
Light Source	SMD (SDCM<6)
Color Temperature	2700K/ 3000K/ 4000K/ 5000K
Luminous Efficiency@4000K	86.6lm/W
CRI	≥80(90/97 optional)
Beam Angle(°)	50°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016


OPTICS

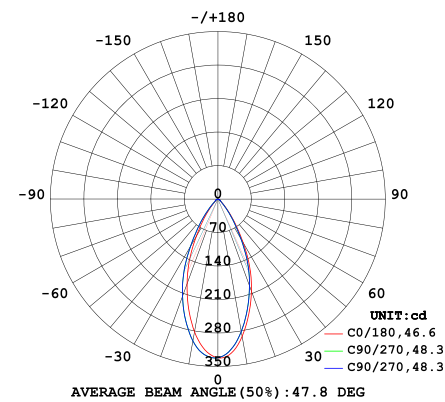

FEATURES & BENEFITS

CCT Selection DIP Switch	-
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.4
Certification	SAA/ RoHS/ CE/ CB

INSTALLATION & ACCESSORIES

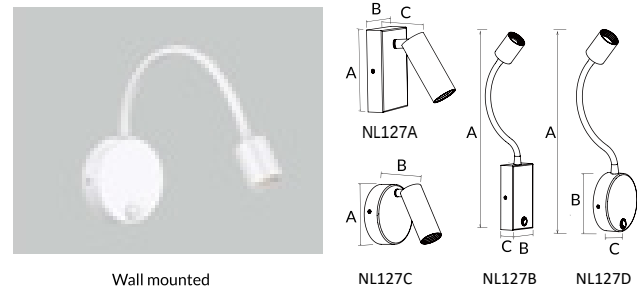

DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL127A-3W	3W	AC200-240V	115x63x71	260lm	0.27	24PCS
NL127B-3W	3W	AC200-240V	364x63x27	260lm	0.28	24PCS
NL127C-3W	3W	AC200-240V	Ø95x71	260lm	0.25	24PCS
NL127D-3W	3W	AC200-240V	344x95x27	260lm	0.27	24PCS