




NT19Track light

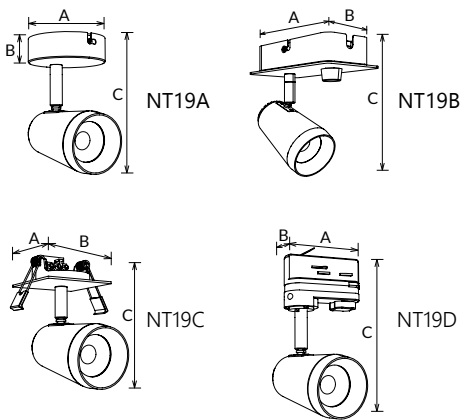

NT19 surface mounred ceiling spotlight adopts die-casting ADC12 with excellent heat management. Dimmable available for wide choice. Adjustable lighting orientation with 350 degree in horizontal direction and 35 in vertical direction provided.

- 36° 60° IP20
- DIM
- AC 100-240V AC 200-240V PF≥0.9 CRI≥80
- SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NT19A-10W	10W	Ø80x25x158	1055lm	0.28	24PCS
NT19A-20W	20W	Ø240x25x158	2110lm	0.84	12PCS
NT19A-30W	30W	Ø240x25x158	3165lm	1.02	12PCS
NT19B-10W	10W	140x80x160	1055lm	0.48	24PCS
NT19B-20W	20W	250x80x160	2110lm	0.90	12PCS
NT19B-30W	30W	370x80x160	3165lm	1.28	12PCS
NT19C-10W	10W	78x78x167	1055lm	0.28	24PCS
NT19D-10W	10W	85x32x175	1055lm	0.28	24PCS

CCT 2700K 3000K 4000K 5000K Finish White Black Silver



NT19A NT19B NT19C NT19D

NT19A-10W NT19A-20W NT19A-30W



NT19B-10W NT19B-20W NT19B-30W

