




NL141


THE POINTER SHAPE LED WALL LIGHT

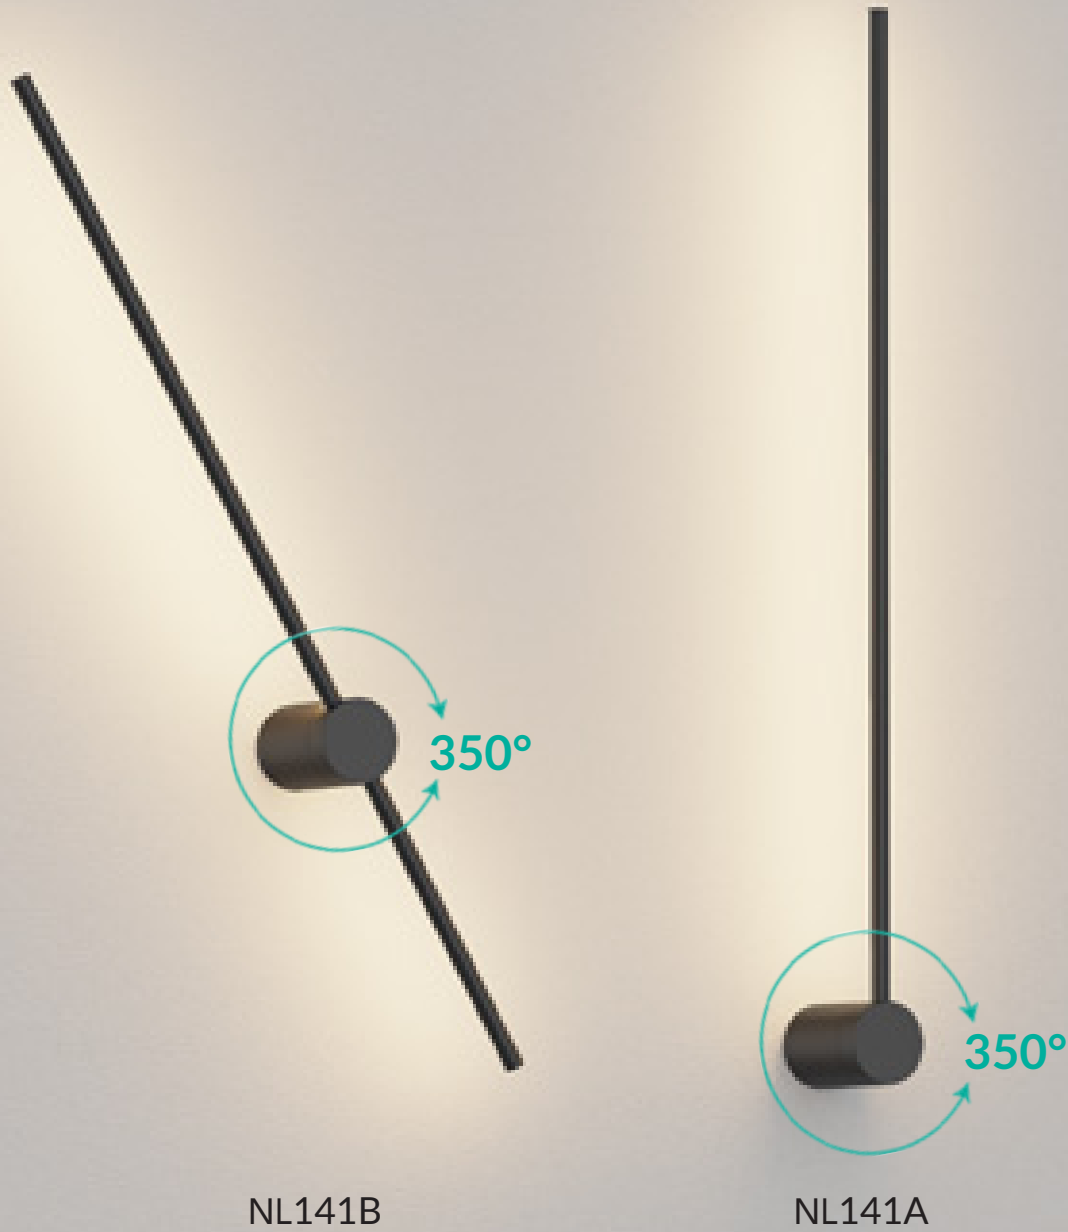

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SDCM<6)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	105lm/w
CRI	≥80(90 optional)
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005


OPTICS

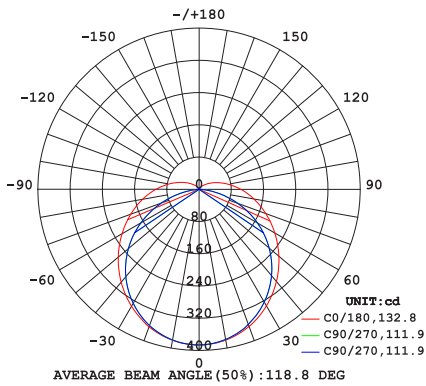


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	SAA / RoHS / CE

INSTALLATION & ACCESSORIES

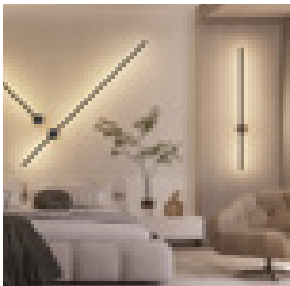

Wall mount



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL141A-12W	12W	AC220-240	600x70x109	1190lm	0.405	12PCS
NL141A-15W	15W	AC220-240	900x70x109	1550lm	0.450	12PCS
NL141A-20W	20W	AC220-240	1200x70x109	2100lm	0.600	12PCS
NL141B-12W	12W	AC220-240	600x70x109	1170lm	0.405	12PCS
NL141B-15W	15W	AC220-240	900x70x1091	1550lm	0.450	12PCS
NL141B-20W	20W	AC220-240	1200x70x109	2100lm	0.600	12PCS