




Back entry with 3 hole and side entry

NL143


CORNICE USE WALL LIGHT

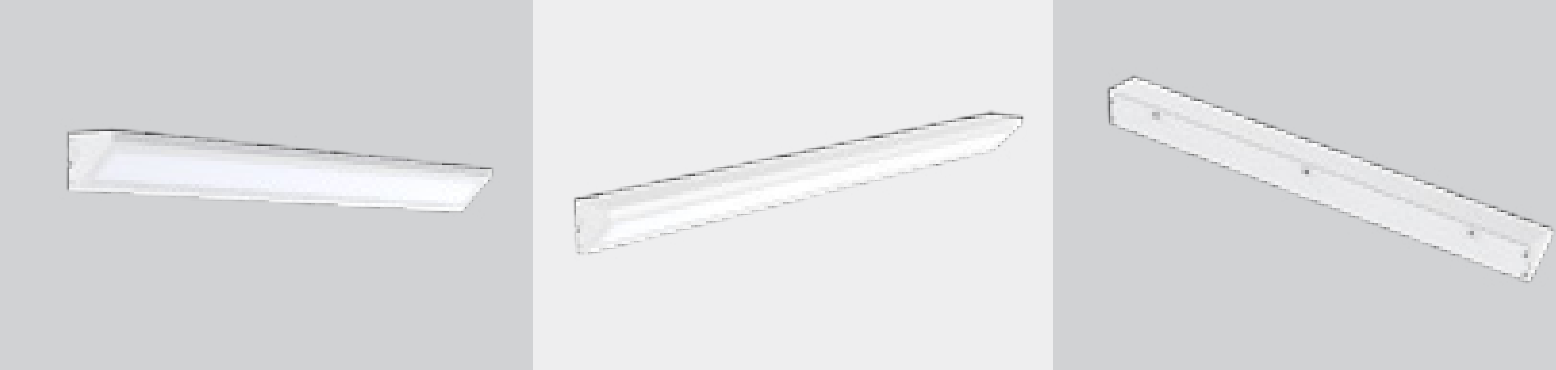

TECHNICAL

Materials of Optics	PC
Materials of Housing	Iron
Light Source	SMD (SDCM<6)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	111lm/w
CRI	≥80
Beam Angle(°)	110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016

OPTICS

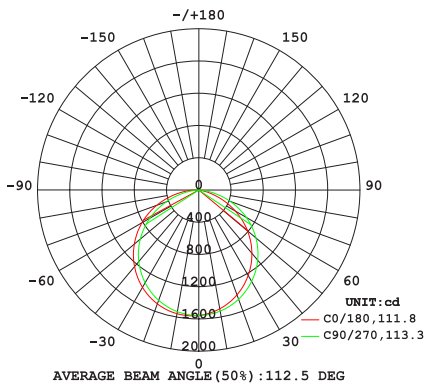


FEATURES & BENEFITS

CCT Selection DIP Switch	-
LED Driver	Built-in
Dimming Option	-
Functions	Emergency
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	SAA / RoHS / CE

INSTALLATION & ACCESSORIES



Wall mount



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL143-1500-40W	40W	AC220-240	1460x110x110	4450lm	6.5	2PCS