





CCT changeable on driver

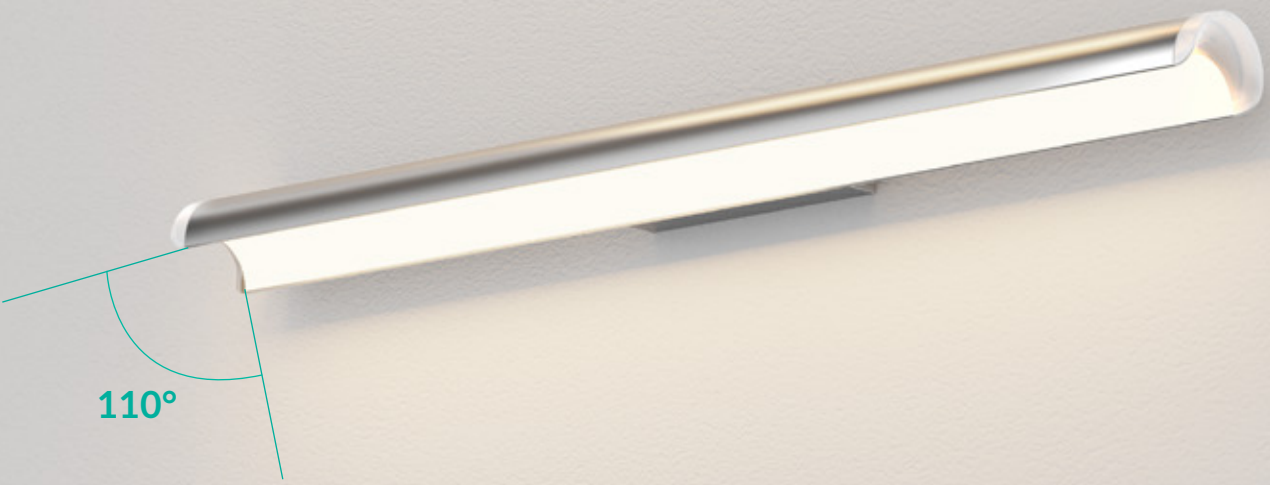

White      Chromed

# NM30


CRESCENT-SHAPED MIRROR  
LIGHT WITHOUT DIRECT LIGHT

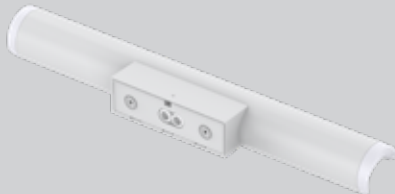

## TECHNICAL

|                           |                           |
|---------------------------|---------------------------|
| Materials of Optics       | PC                        |
| Materials of Housing      | AL6063                    |
| Light Source              | SMD (SDCM≤3)              |
| Color Temperature         | 3000K/ 4000K/ 5000K/5700K |
| Luminous Efficiency@4000K | 100m/w                    |
| CRI                       | ≥80                       |
| Beam Angle(°)             | 110°                      |
| UGR                       | -                         |
| Lifetime(hr)              | 50,000h                   |
| Product Finishing         | White RAL9016/Chromed     |

## OPTICS

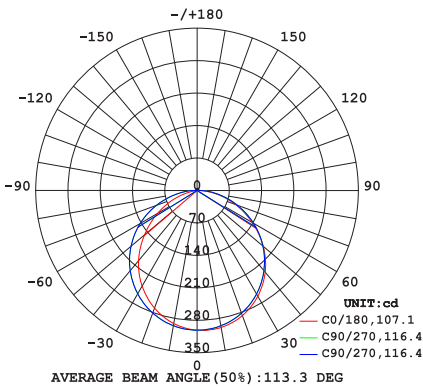


## FEATURES & BENEFITS

|                                |               |
|--------------------------------|---------------|
| CCT Selection DIP Switch       | 3-CCT         |
| LED Driver                     | Built-in      |
| Dimming Option                 | -             |
| Functions                      | -             |
| Ingress Protection (IP Rating) | IP40          |
| Impact Resistance (IK Rating)  | IK03          |
| Power Factor (PF)              | ≥0.9          |
| Certification                  | SAA/ RoHS/ CE |

## INSTALLATION & ACCESSORIES



Wall mounted



## DATA SHEET

| CODE         | WATT | INPUT VOLTAGE(V) | SIZE(AxBxCmm) | LUMEN(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|--------------|------|------------------|---------------|------------|-------------|----------|
| NM30-460-6W  | 6W   | AC220-240V       | 462x102x59    | 650lm      | 0.54        | 12PCS    |
| NM30-580-10W | 10W  | AC220-240V       | 580x102x59    | 1080lm     | 0.64        | 12PCS    |
| NM30-850-15W | 15W  | AC220-240V       | 847x102x59    | 1600lm     | 0.81        | 6PCS     |