




NO-06

LED freestanding luminaire

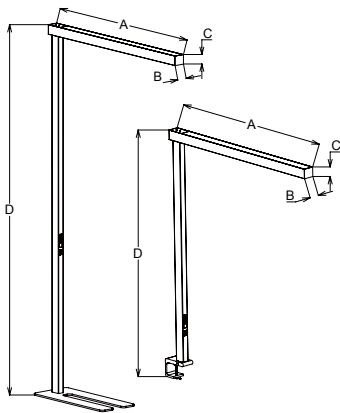

This NO-06 free-standing luminaire is composed of three parts. NO-06A is for floor standing, NO-06B is for desk installation. NO-06C is for floor standing with smart control, NO-06D is for desk installation with smart control. Direct and indirect optic design, UGR<16, up 75% & down 25% lighting, up to 125lm/W high light efficiency. 0-10V dimmer, light sensor, PIR sensor module and USB connector are available. The configuration of the luminaire is triggered by pressing a button. The lighting control modules are interchangeable, which is very suitable for modern office environments.


- 80°x50°
- 60°x60°x15°
- UGR<16
- 0-10V
- Smart Lighting
- AC 220-240V
- PF≥0.93
- CRI≥80
- RoHS
- CE

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NO-06A-80W -DOS	80W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS
NO-06B-80W-DOS	80W	1060x60x53x1276	10500lm	5.10	3PCS
NO-06C-85W-B	85W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS
NO-06C-75W-B1	75W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS
NO-06D-85W-B	85W	1060x60x53x1276	10500lm	5.10	3PCS
NO-06D-75W-B1	75W	1060x60x53x1276	10500lm	5.10	3PCS



NO-07

LED freestanding luminaire

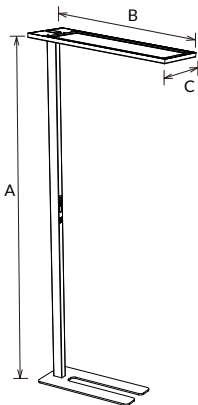

NO-07 LED freestanding luminaire with professional version and intelligent version. The professional version could be PIR sensor and daylight sensor. The intelligent version could be CCT changeable and dim by CANSAMBI. 120 degree beam angle and UGR<16 could provide uniform lighting performance.

- 120°
- IP40
- UGR<16
- 0-10V
- CANSAMBI
- AC 220-240V
- PF≥0.9
- CRI≥80
- RoHS
- CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NO-07A-75W-DOS	75W	1925x920x300	7500lm	14	3PCS
NO-07A-100W-DOS	100W	1925x920x300	10000lm	14	3PCS
NO-07B-85W-B	85W	1925x920x300	8500lm	14	3PCS
NO-07B-100W-B	100W	1925x920x300	10000lm	14	3PCS
NO-07B-75W-B1	75W	1925x920x300	7500lm	14	3PCS
NO-07B-100W-B1	100W	1925x920x300	10000lm	14	3PCS