





White



Golden

NM33


THE CLASSICAL PAINTING
SCROLL SHAPE

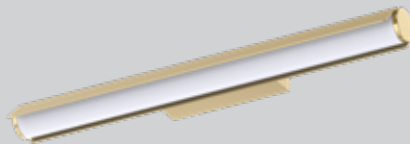

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SDCM<3@White color)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	100lm/W
CRI	≥80
Beam Angle(°)	110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016 / Golden RAL1001

OPTICS

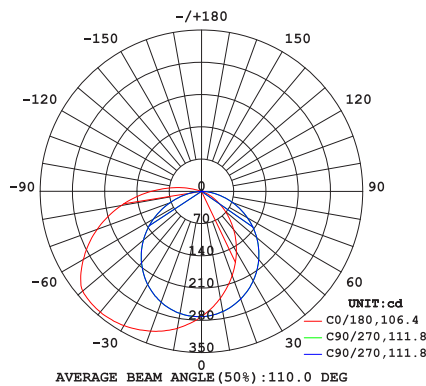


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM33-450-6W	6W	AC220-240	450x107x51	600lm	0.69	12PCS
NM33-600-10W	10W	AC220-240	600x107x51	930lm	0.88	12PCS
NM33-600-12W	12W	AC220-240	600x107x51	1100lm	0.88	12PCS
NM33-900-12W	12W	AC220-240	900x107x51	1100lm	1.23	12PCS
NM33-900-15W	15W	AC220-240	900x107x51	1360lm	1.23	12PCS