





ND122 Downlight



ND122 Gimbal downlight adopts brand CITIZEN COB, exchangeable reflector and tempered glass, ADC12 aluminum heatsink. Horizontally 355° and vertically 30° rotatable. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

- ▶ 24° 45° 60°
- ▶ 355°
- ▶ 30°
- ▶ IP20
- ▶ DIM
- ▶ DALI
- ▶ 0-10V
- ▶ AC 200-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ CRI≥90
- ▶ CRI≥97
- ▶ SAA
- ▶ RoHS
- ▶ CE

ND297A Downlight

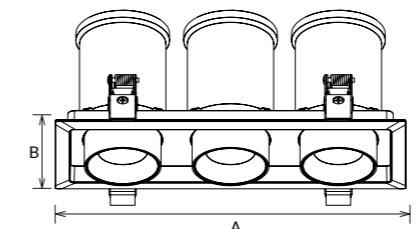

ND297A LED downlight adopts high lumen COB light source, the special optic lens and reflector design offer a uniform light output and low glare effect. It is an extension design, 360 degree horizontal rotation and 68 degree vertically rotation. And it has round shape, square shape with single/triple heads which is suitable for various application area.

- ▶ 24° 36°
- ▶ 30°
- ▶ IP20
- ▶ DIM
- ▶ AC 200-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ CRI≥90
- ▶ SAA
- ▶ RoHS
- ▶ CE

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ND122-4-18W	18W	Ø150x116	Ø130-140	1820lm	0.71	12PCS
ND122-4-25W	25W	Ø150x116	Ø130-140	2430lm	0.71	12PCS
ND122-6-25W	25W	Ø185x130	Ø160-170	2420lm	1.10	12PCS
ND122-6-35W	35W	Ø185x130	Ø160-170	3260lm	1.10	12PCS
ND122-6-42W	42W	Ø185x130	Ø160-170	3780lm	1.10	12PCS

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ND297A-2.5-10W/15W	10W/15W	Ø100x114	Ø83-90	900lm/1350lm	0.50	24PCS
ND297A-1010-10W/15W	10W/15W	100x100x114	83-90x83-90	900lm/1350lm	0.50	24PCS
ND297A-1018-20W/30W	20W/30W	180x100x114	85-90x165-170	1800lm/2700lm	0.90	12PCS
ND297A-1026-30W/42W/45W	30W/42W/45W	260x100x114	85-90x245-250	2700lm/4050lm /3600lm	1.50	6PCS

CCT ————— 2700K 3000K 4000K 5000K

Trim ————— White Black

CCT ————— 2700K 3000K 4000K 5000K

Trim ————— White Black