



Patent

NDB104A Linear light




This linear fxture is a splicing design. Adopt high lumen SMD LED light source and high light transmittance PC cover. Easy installation and maintenance with high cost performance, 1200mm and 1500mm size optional. UGR<19 with low glare. Function: CCT Changeable, DALI dimmable.

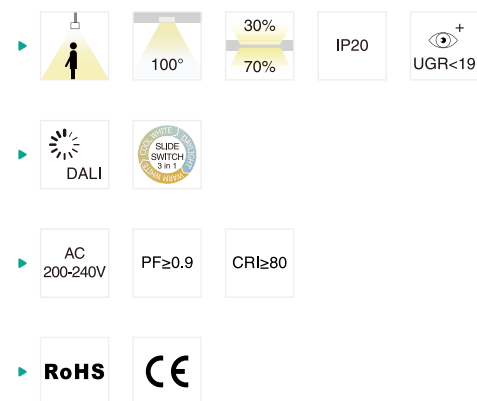


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NDB104A-1200-40W-DA	40W	1200x200x50	4600lm	4.91	4PCS
NDB104A-1200-40W-DAP2	40W	1200x200x50	4600lm	4.91	4PCS
NDB104A-1500-55W-DA	55W	1500x200x50	6300lm	5.79	2PCS
NDB104A-1500-55W-DAP2	55W	1500x200x50	6300lm	5.79	2PCS

CCT ——— 3000K 4000K 5700K


Finish ——— Gray

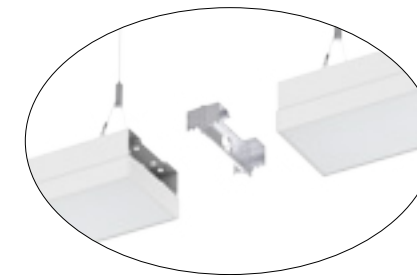

NDB105A Linear light



NDB105A is a newly seamless splicing batten design, which adopts high lumen SMD reaching 120lm/W, prism lamp shade to offer a uniform light output and flicker free driver inside. Interchangeable CCT with slide switch is available. Surface mounted, pendant and splicing installation for options.

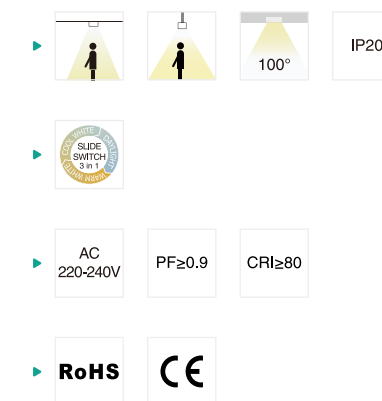

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NDB105A-600-24W-C3 Surface mount	24W	600×120×70	3000lm	1.26	12PCS
NDB105A-1200-38W-C3 Surface mount	38W	1200×120×70	5000lm	2.35	6PCS
NDB105A-1500-55W-C3 Surface mount	55W	1500×120×70	7000lm	2.88	4PCS
NDB105A-600-24W-C3 Pendant	24W	600×120×70	3000lm	1.38	12PCS
NDB105A-1200-38W-C3 Pendant	38W	1200×120×70	5000lm	2.47	6PCS
NDB105A-1500-55W-C3 Pendant	55W	1500×120×70	7000lm	3.00	4PCS

CCT ——— 3000K 4000K 5700K

Finish ——— White Black

Installation accessories ——— Suspension kit